



SOLID
TO SUCCEED

AS

ARTICULATED BOOM LIFT

XGA16K

Standard configuration

Work Area

- Tri-Entry Platform With Side Swing Gate

Power

- Cold Start Components
- Engine Intake Air Pre-Filter Assembly
- Engine Condition Monitoring And Start Protection Device

Drive

- 4-Wheel Drive
- Axle Oscillation

Safe

- Descent And Motion Alarm
- Tilt Alarm
- Horn With Adjustable Volume
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- Axle Oscillation Pressure Detection System
- 4-Wheel Braking System

Other Features

- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Two-Speed Drive
- Telematics Front-End Interface
- Anti-Entrapment System
- Hostile Environment Package
- Swing-Out Engine Tray
- Thumb Rocker Steering
- Platform Power



Working height
16.63 meters



Lift capacity
256 / 350 kg



Diesel
power



Optional configuration

- Foam-Filled Tires (Φ836 mm × 319 mm)
- Solid Tire(φ834mm×270mm)
- Hydraulic Generator
- Mechanical Anti-Entrapment Device
- Air Line
- Tool Tray
- Working Light Assembly
- Fall Arrest Assembly
- Platform Anti-Squeeze Auxiliary Rail
- Platform Half-Mesh

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XGA16K



SOLID
TO SUCCEED


Articulated Boom Lift-Engine Powered

Item	Metric	
Dimension		
Overall Dimension - Stowed	Length	6850 mm
	Width	2320 mm
	Height	2380 mm
Overall Dimension - Transported	Length	5600 mm
	Width	2320 mm
	Height	2650 mm
Platform Dimensions	Length	1830 mm
	Width	760 mm
	Height	1150 mm
Wheelbase		2360 mm
Jib Length		1420 mm
Min. Ground Clearance		300 mm



Performance	
Max. Working Height	16.63 m
Max. Platform Height	14.63 m
Max. Outreach	8.82 m
Max. Up And Over Clearance	7.7 m
Max. Lift Capacity	256 / 350 kg
Max. Platform Occupancy	2/3
Max. Chassis Allowable Angle	X-5°/Y-5°
1St Boom Luffing Range	0°~65°
2Nd Boom Luffing Range	-11°~75°
Fly Boom Luffing Range	-60°~70°
Turntable Rotation	355°
Platform Rotation	160°
Machine Weight	7600 kg
Driving Speed (Stowed)	5.5 km/h
Driving Speed (Raised Or Extended)	0.6 km/h
Min. Turning Radius (Inside/Outside)	3200 mm/4700 mm
Turntable Tailswing (Stowed)	0
Max. Gradeability (Counterweight Downhill)	45 % (24°)

Power Source	
Control	12 V DC proportional control
Emergency Power Supply	12 V / 180 Ah
Engine Model	V2403-CR-EW02
Engine Power / Rpm	36.8 kW (2700r/min)
Max. Engine Torque	157.4 N · m/(1600r/min)
Engine Emission Standard	Tier 4
Hydraulic Tank Capacity (Effective Volume)	80 L
Fuel Tank Capacity	65 L



Tire	
Tire Size	Φ835 mm × 290 mm
Ply Rating Of Tire	/
Tire Ground Pressure	6.09 kg/cm ²
Driving Wheels	4
Braking Wheels	4
Steering Wheels	2

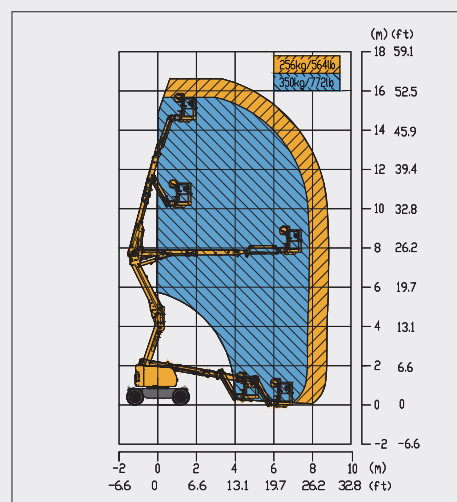

Stowed

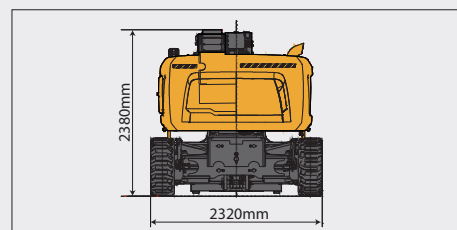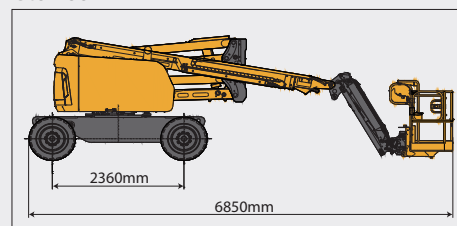

Trans

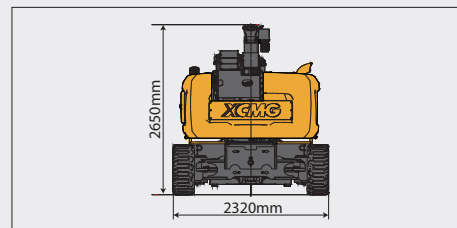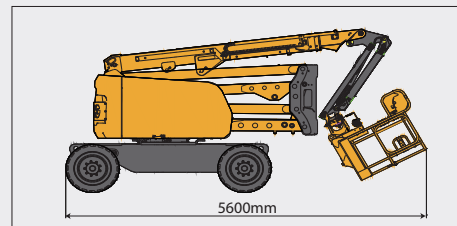

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.