



SOLID
TO SUCCEED

AS

TELESCOPIC BOOM LIFT

XGS28ACK

Standard configuration

Work Area

- Tri-Entry Platform With Side Swing Gate Drive
- Axle Oscillation

Safe

- Descent And Motion Alarm
- Tilt Alarm
- Horn With Adjustable Volume
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- Axle Oscillation Pressure Detection System
- 4-Wheel Braking System

Other Features

- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Telematics Front-End Interface
- Anti-Entrapment System
- Hostile Environment Package
- Thumb Rocker Steering
- Platform Power
- Tool Tray
- Vehicle Parking Brake



Working height
28.8 meters



Lift capacity
300/460kg



Electric
power



Optional configuration

- Solid Tires (φ995mm×380mm)
- Foam-Filled Tires (Φ995mm×380mm)
- Main Power Source - Battery
- Air Line
- Working Light Assembly
- Fall Arrest Assembly
- Platform Anti-Squeeze Auxiliary Rail
- Platform Half-Mesh
- Mechanical Anti-Entrapment Device

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com


XGS28ACK





SOLID
TO SUCCEED

Telescopic Boom Lift-Electric



Item		Metric
Dimension		
Overall Dimension - Stowed	Length	11690mm
	Width	2490mm
	Height	2925mm
Overall Dimension - Transported	Length	9550mm
	Width	2490mm
	Height	3100mm
Platform Dimensions	Length	2400mm
	Width	900mm
	Height	1150mm
Wheelbase		3200mm
Jib Length		1850mm
Min. Ground Clearance		320mm
Performance		
Max. Working Height		28.8m
Max. Platform Height		26.8m
Max. Outreach		22m
Max. Lift Capacity		300/460kg
Max. Platform Occupancy		2/3
Max. Chassis Allowable Angle		X-5° / Y-5°
Telescopic Boom Luffing Range		-4°~73°
Fly Boom Luffing Range		-65°~70°
Turntable Rotation		360°
Platform Rotation		160°
Machine Weight		17500kg
Driving Speed (Stowed)		6km/h
Driving Speed (Raised Or Extended)		0.6km/h
Min. Turning Radius (Inside/Outside)		3500mm/6500mm
Turntable Tailswing (Stowed)		1890mm
Max. Gradeability (Counterweight Uphill)		45% (24°)
Power Source		
Control		12 V DC proportional control
Main Power Unit		25.4kW/50V (AC)
Auxiliary Power Unit		1.9kW/12V (DC)
Traveling Motor		5.2kW/52V(AC)
Emergency Power Supply		12V/120Ah
Main Power-Battery		80.5V/604Ah(Lithium Battery)
Main Power Source - Charger		80V/80A
Tire		
Tire Size		φ1000mm×388mm
Ply Rating Of Tire		18
Tire Ground Pressure		9.39kg/cm ²
Driving Wheels		4
Braking Wheels		4
Steering Wheels		2
Hydraulic Oil Capacity		
Hydraulic Tank Capacity		110L

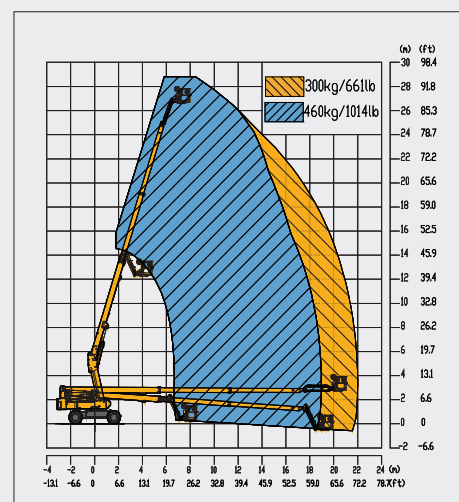

Stowed

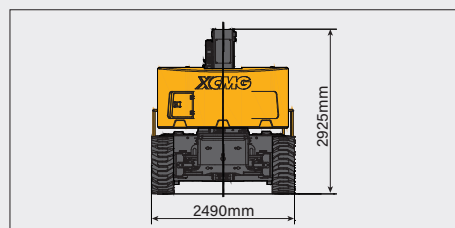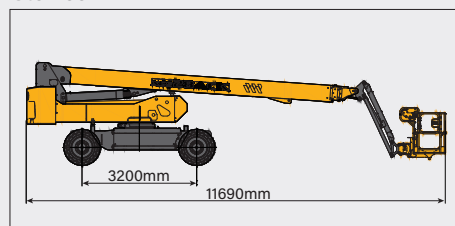

Trans

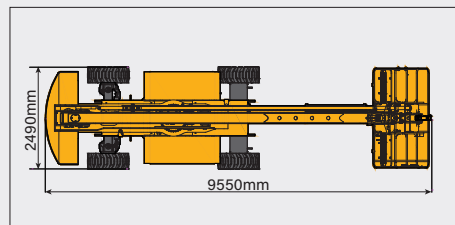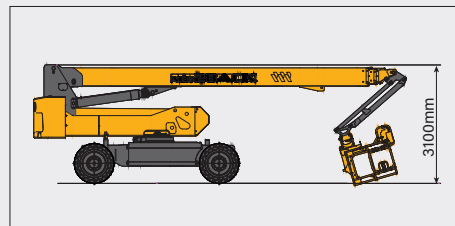

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.