



SOLID
TO SUCCEED

SCISSOR LIFT XG0810C

Standard configuration

Work Area

- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail

Drive

- Rear-Wheel Drive

Performance

- Travel Driven By AC Motor
- Full Proportion Travel And Lift Control
- 30 % Gradeability

Power

- DC Maintenance-Free Battery

Applicability

- Lubrication-Free Bearing
- Brake Release For Towing

Safe

- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Boom Maintenance Lock
- Auto Brake System
- Fault Diagnosis System
- Electric Horn
- No Traveling With Platform Elevated
- Charging Protection System

Other Features

- Removable Platform Control
- Intelligent Charger
- Hourmeter
- Side Forklift Pockets For Transportation
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Manual Platform Descent Valve
- Tilt Sensor And Audio Alarm
- White Rubber Track



Working height
8.8/0m



Lift capacity
250Kg



Electric
power



Optional configuration

- Platform Searchlight
- Platform External Power Supply
- Air Line
- Platform Fire Extinguisher
- Platform Foot Pedal
- Black Rubber Track

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XG0810C



SOLID
TO SUCCEED

Scissor Lift-Electric

Item	Metric
Dimensions	
Max. Working Height (Indoor/Outdoor)	8.8/0m
Max. Platform Height (Indoor/Outdoor)	6.8/0m
Min. Platform Height	1.1m
Max. Platform Drive Height	1.1m
Overall Length (Without Ladder/Outriggers)	2135(2001)mm
Overall Width	990mm
Overall Height (Platform Folded)	2234(1699)mm
Platform Length	1938mm
Platform Width	950mm
Platform Extension Length	900mm
Min. Ground Clearance	86mm
Track Dimension	T200×72K×59



Performance	
Rated Load	250kg
Load On Platform Extension	115kg
Max. Platform Occupancy (Indoor/Outdoor)	2/0
Max. Driving Speed (Stowed)	2km/h
Max. Driving Speed (Raised)	0km/h
Max. Gradeability	30%
Min. Turning Radius (Inside)	0m
Min. Turning Radius (Outside)	2.5m
Platform Raising Time	25-34s
Platform Lowering Time	29-38s
Max. Working Slope (Side To Side/Front And Rear)	1.7°/2.0°
Tire Ground Pressure	0.295kgf/cm ²
Driving Wheels	2
Braking Wheels	2
Steering Wheels	Zero-Turn Steering

Power Source	Maintenance-free lead-acid batteries
Battery Voltage	24V
Battery Capacity (3HR)	200Ah
Battery Charger	24/36V/A
Traveling Motor	1.1/16kW/V
Lifting Motor	2.2/24kW/V


Hydraulic Oil Capacity	
Hydraulic Tank Capacity	10L

Weight	
Machine Weight	1700kg

Trans

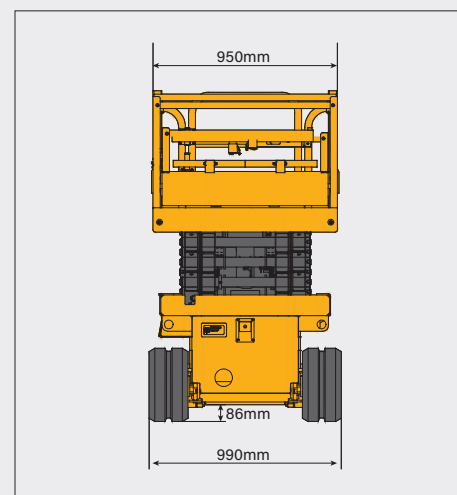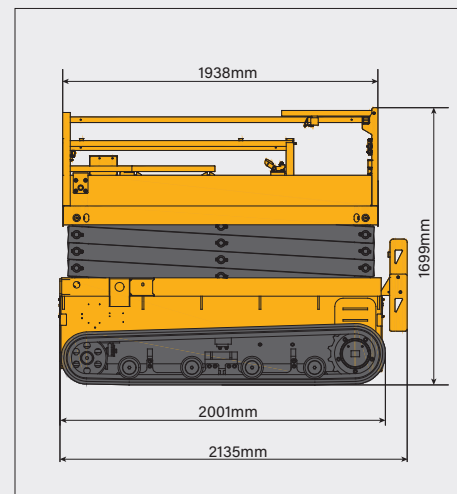

Platform Extd

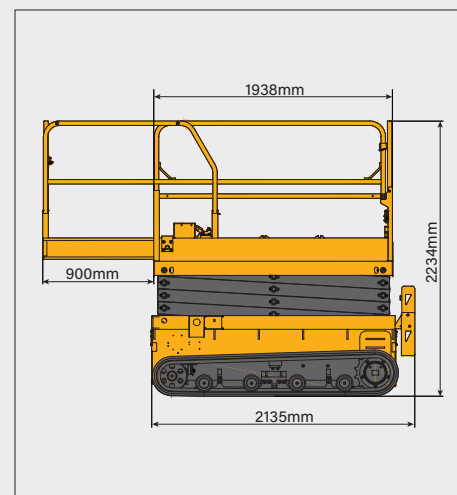

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.