

SOLID TO SUCCEED


TELEHANDLERS
XT3207KH



LOAD CHART

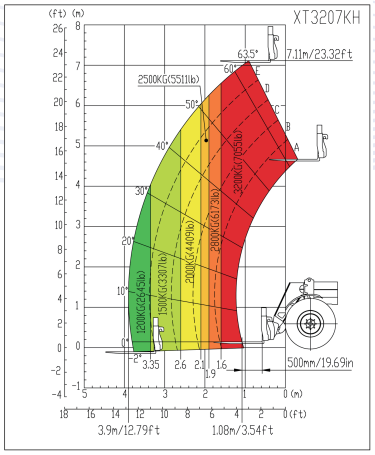

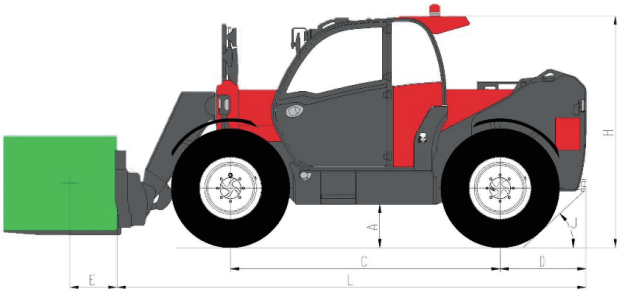

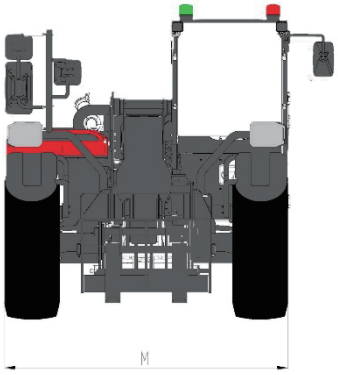

STATIC DIMENSIONS

Dimensions		Metric
Min. Ground Clearance	A	420 mm
Front Overhang	B	/
Wheelbase	C	2850 mm
Rear Overhang	D	910 mm
Load Center Distance	E	500 mm
Overall Length	L	4960 mm
Overall Height	H	2400 mm
Overall Width	M	2320 mm
Approach Angle	I	/
Departure Angle	J	42.5°

XT3207KH

PARAMETERS

Parameters	Metric
Dimensions	
Overall Length	4960 mm
Overall Width	2320 mm
Overall Height	2400 mm
Wheelbase	2850 mm
Track Width	1860 mm
Min. Ground Clearance	420 mm
Fork Dimensions	1200 × 122 × 45 mm
Weight and Tyres	
Unladen Weight (with forks)	7700 kg
Standard Tires / Tire Size	460/70R24
Performance	
Rated Load	3200 kg
Load Center Distance	500 mm
Max. Lifting Height (To Upper Plane Of Forks)	7.11 m
Lift Capacity At Max. Lifting Height	3200 kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires)	3.9 m
Lift Capacity At Max. Outreach	1200 kg
Boom Lifting Time	⩽8.5 s
Boom Lowering Time	⩽7.5 s
Boom Extension Time	⩽8.5 s
Boom Retraction Time	⩽7 s
Fork Dump Time	⩽4.5 s
Fork Crowd Time	⩽3.5 s
Boom Lifting Range	-2°～63.5°
Fork Tilt Angle Range (Boom Being Horizontal)	-14°～132°
Max. Travel Speed	40 km/h
Max. Traction Force	⩾60 kN
Min. Turning Radius	⩽3900 mm
Engine	
Power Source	Diesel Engine
Engine Brand/Model	Deutz TCD 3.6
Number Of Cylinders	4
Engine Rated Power	85 kw
Emissions	Stage V
Rated Speed	2200 r/min
Max. Torque @ Rpm	460 N.m@1600 RPM
Fuel Tank Capacity	120 L
Transmission	
Number of Gears (Forward/Reverse)	CVT
Transmission Type	Hydrostatic Transmission
Steering Mode	4-Wheel Steering
Drive Type	4 × 4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28 MPa
Hydraulic System Flow	160 L/min
Hydraulic Tank Capacity	145 L

STANDARD CONFIGURATION

- **Cab**
  - FOPS/ROPS Certified Cab
  - Air Conditioning
  - 4-Way Adjustable Steering Column
  - 10" Main Display
  - 4.3" Sub Display
  - Radio
  - Bluetooth Hands-Free
  - 12 V Power Outlet
  - USB/Type-C Charging Port
  - Roof Sun Blind
  - Front Sun Visor
  - Interior Rearview Mirror
  - Exterior Rearview Mirror
  - Reversing Camera
  - Front Wiper
  - Rear Wiper
  - Roof Wiper
  - Rear Window Defroster
  - Fire Extinguisher
  - Dual Rotating Beacon (Amber/Amber)
  - Air-Suspended Fabric Seat
  - Reversing Buzzer
  - Cup Holder
  - Emergency Hammer
  - Seat Belt Reminder / Seat Belt Unbuckled Alarm
  - Multifunction Proportional Joystick
  - Emergency Stop Switch
  - License Plate Light
- **Power Transmission**
  - 4-Wheel Drive
  - 3 Steering Modes
  - Rear Axle Centering Display / Rear Axle Center Position Indicator
  - Engine Intake Heater / Air Intake Heater
  - Front Axle Limited-Slip Differential
  - Wet Brake System
- **Electrical System**
  - Torque Limiter
  - Working Envelope Display
  - Joystick Lock
  - Boom-Mounted Work Light
  - Cab Front And Rear Work Lights
  - Seat Belt Unbuckled Alarm
  - Seat Occupancy Sensor/Unoccupied Alert
- **Hydraulic System**
  - Open-Center Load Sensing System
  - Boom Tip Damping System
  - Quick Coupler Pressure Relief
  - Automatic Fork Leveling
- **Miscellaneous**
  - Auto Reversing Fan / Automatic Reversing Fan
  - Safety Strut
  - Front Tow Hitch
  - Rear Tow Hitch
  - Manual Centralized Lubrication System
  - Wheel Chock

OPTIONAL CONFIGURATION

- Dual Rotating Beacon (Amber/Green)
- Air-Suspended Leather Seat
- Ventilated and Heated Fabric Seat
- Ventilated and Heated Leather Seat
- Electrically Adjustable Right Exterior Rear-View Mirror
- Telephone Holder / Phone Holder
- Front Falling-Object Guard
- Boom Suspension
- Wheel Nut Indicators
- Foam-Filled Tires
- Hydraulic Quick Coupler
- JCB Q-fit Quick Hitch
- Attachment Electrics / Electrical Connection for Attachments
- White-Noise Reversing Alarm
- Multi-Circuit Hydraulics for Attachments / Multi-Circuit Auxiliary Hydraulics for Attachments
- Tow Hook / Towing Hook

OPTIONAL ATTACHMENTS

- Fork (3.2t, 1.2m)
- Bucket (1m^3; 1.6m^3; 2.5m^3; 1m^3 with teeth)
- Hook (4t)