




TELEHANDLER XT2506KH

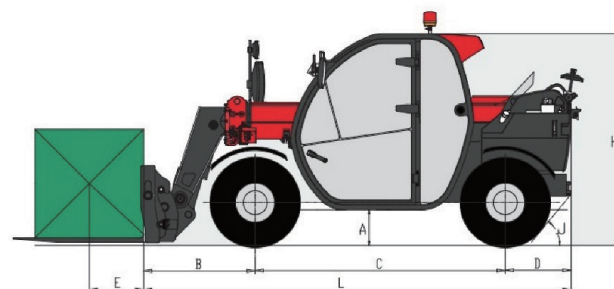

► LOAD CHART

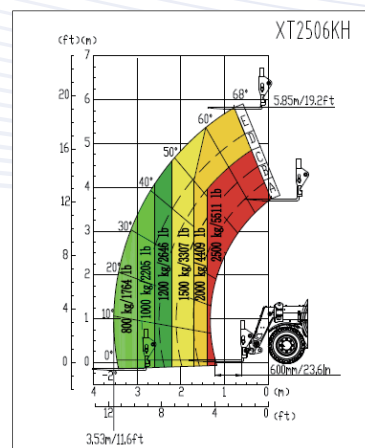

► STATIC DIMENSIONS

Dimensional Drawing		Metric
Min. Ground Clearance	A	330 mm
Front Overhang	B	1025 mm
Wheel Base	C	2300 mm
Rear Overhang	D	605 mm
Load Center Distance	E	600 mm
Overall Length	L	3930 mm
Overall Height	H	1975 mm
Overall Width	M	1835 mm
Departure Angle	I	43°

XT2506KH

▶ PRODUCT PARAMETER

Item	Metric
Dimension	
Overall Length	3930 mm
Overall Width	1835 mm
Overall Height	1975 mm
Wheel Base	2300 mm
Track Width	1500 mm
Min. Ground Clearance	330 mm
Fork Dimensions	1200×122×40 mm
Weight And Tires	
Machine Weight (With Fork)	5200 kg
Tire Specification	12-16.5
Performance	
Rated Load	2500 kg
Load Center Distance	600 mm
Max. Lifting Height (To Upper Plane Of Forks)	5.85 m
Lift Capacity At Max. Lifting Height	2000 kg
Max. Outreach (Boom Level, Load Center To Front Tire Face)	3.53 m
Lift Capacity At Max. Outreach	800 kg
Boom Lifting Time	≤ 7.5 s
Boom Lowering Time	≤ 5.5 s
Boom Extension Time	≤ 4.8 s
Boom Retraction Time	≤ 3.5 s
Fork Dump Time	≤ 3.2 s
Fork Crowd Time	≤ 3.2 s
Boom Lifting Range	-2° ~ 68°
Fork Tilt Angle Range (Boom Being Horizontal)	-12° ~ 117°
Max. Travel Speed	20 km/h
Max. Traction Force	≥ 32 kN
Minimum Turning Radius (Outside of Tire)	≤ 3310 mm
Power System	
Power Source	Diesel Engine
Engine Brand/Model	Kubota V3307
Number Of Cylinders	4
Engine Rated Power	52.6 kw
Emissions	Stage V/T4F/China IV
Rated Speed	2400 r/min
Max. Torque @ Rpm	285N.m@1500rpm
Fuel Tank Capacity (Effective Volume)	95 L
Transmission System	
Numbers Of Gears (Forward/Reverse)	1/1
Transmission Type	Hydrostatic Transmission
Steer Mode	4-Wheel Steering
Drive Mode	4×4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28 Mpa
Hydraulic System Flow	100 L/min
Hydraulic Tank Capacity (MAX Capacity)	90 L

▶ STANDARD CONFIGURATION

- **Cab**
 - FOPS And ROPS Certification
 - Air Conditioning
 - 4-Way Adjustable Steering Column
 - 8" Main Display
 - 4.3" Sub Display
 - Radio
 - Bluetooth Call
 - 12 V Power Outlet
 - USB/Type-C Charging Port
 - Top Sun Visor
 - Front Sun Visor
 - Interior Rearview Mirror
 - Exterior Rearview Mirror
 - Reversing Camera
 - Front Wiper
 - Rear Wiper
 - Top Wiper
 - Rear Window Defroster
 - Fire Extinguisher
 - Dual-Rotating Alarm Light (Yellow+Yellow)
 - Air-Suspended Fabric Seat
 - Emergency Hammer
 - Emergency Stop Switch
 - Cup Holder
 - Reversing Buzzer
 - Multifunction Proportional Joystick
 - License Plate Light Assembly
- **Power Transmission**
 - 4-Wheel Drive
 - Three Steering Modes (2WS / 4WS / Crab)
 - Rear Axle Center Position Display
 - Limited Slip Differential on Front Axle
 - Wet Brake System
 - Engine Inlet Heating
- **Electrical System**
 - Load Moment Indicator
 - Working Envelope Display
 - Joystick Lock
 - LED Work Lights On Boom
 - LED work lights on cab
 - Seat Belt Unbuckled Alarm
 - Operator Presence Sensing
- **Hydraulic System**
 - Open-Center Load Sensing System
 - Boom Soft-stop Function
 - Hydraulic Auxiliary Venting System
 - Automatic Fork Leveling
- **Others**
 - Safety Strut
 - Rear Tow Hitch

▶ OPTIONAL CONFIGURATION

- Dual-Rotating Alarm Light (Yellow+Green)
- Air Suspension Leather Seat
- Right Electric Rearview Mirror
- Mobile Phone Holder
- Falling Object Protective Structure
- Wheel-Nut Indicators
- Parking Wedge
- Electrical Outlet for Attachments
- Multi-Circuit Hydraulic System For Attachments
- White-Noise Reverse Alarm

▶ OPTIONAL ATTACHMENTS

- Bucket
- Hook
- Rotator Fork