



SOLID
TO SUCCEED

TELESCOPIC BOOM LIFT

XGS34ACK-LI

Standard configuration

Work Area

- 2.4 m × 0.9 m Work Platform
- 460 Kg Platform Capacity
- 160° Platform Rotation

Power

- 76.8V High-Capacity Battery
- 12V DC Auxiliary Power

Drive

- 4-Wheel Drive
- Axle Oscillation

Safe

- Descent And Motion Alarm
- Tilt Alarm
- Horn
- Overload Alarm
- Motor Overload Protection
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- 4-Wheel Braking System

Other Features

- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Anti-Entrapment System
- 360° Continuous Turntable Rotation
- Telematics Front-End Interface
- Hostile Environment Package
- Thumb Rocker Steering



Working height
34.5 meters



Lift capacity
300/460Kg



Electric
power



Optional configuration

- Solid Tire
- Main Power Source - Battery (76.8V/554Ah)
- Main Power Source - Battery (76.8V/608Ah)
- Mechanical Anti-Entrapment Device
- Tool Tray
- Working Light Assembly

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XGS34ACK-LI



SOLID
TO SUCCEED

Telescopic Boom Lift-Electric

Item		Metric
Dimensions		
Overall Dimension - Stowed	Length	13780mm
	Width	2490mm
	Height	2980mm
Overall Dimension - Transported	Length	13780mm
	Width	2490mm
	Height	2980mm
Platform Dimensions	Length	2400mm
	Width	900mm
	Height	1150mm
Wheelbase		3200mm
Jib Length		1850mm
Min. Ground Clearance		320mm

Performance


Max. Working Height	34.5m
Max. Platform Height	32.5m
Max. Outreach	20.5m
Max. Lift Capacity	300/460kg
Max. Platform Occupancy	2/3
Max. Chassis Allowable Angle	X-3°/ Y-3°
Telescopic Boom Luffing Range	-4° ~ 73°
Fly Boom Luffing Range	-65° ~ 70°
Turntable Rotation	360°
Platform Rotation	160°
Machine Weight	18700kg
Driving Speed (Stowed)	6.0km/h
Driving Speed (Raised Or Extended)	0.6km/h
Min. Turning Radius (Inside/Outside)	4600mm/6500mm
Turntable Tailswing (Stowed)	1980mm
Max. Gradeability (Counterweight Uphill)	45% (24°)

Power Source



Control	12 V DC proportional control
Main Power Unit	25.4kW/52V AC
Auxiliary Power Unit	1.9kW/12V
Traveling Motor	5.2kW/52V AC
Emergency Battery Specifications	12V/120Ah
Main Power Source - Battery	76.8V/560Ah
Charger Specifications	80V/80A
Hydraulic Tank Capacity (Effective Volume)	150L

Tire



Tire Size	φ1000mm×388mm
Ply Rating Of Tire	18
Tire Ground Pressure	7.1kg/cm ²
Driving Wheels	4
Braking Wheels	4
Steering Wheels	2

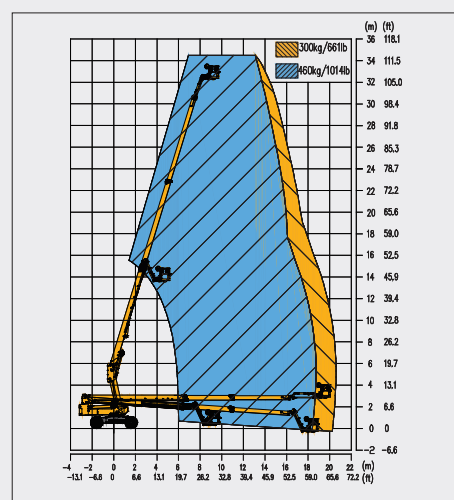

Stowed

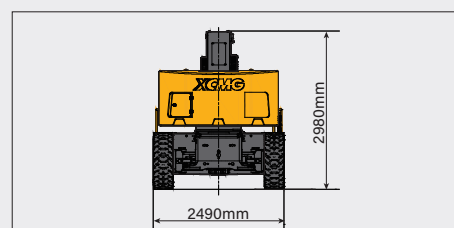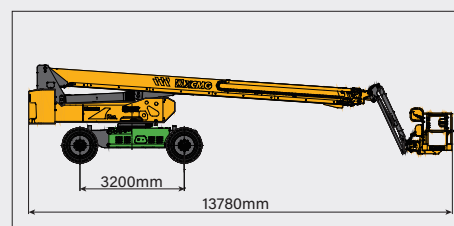

Trans

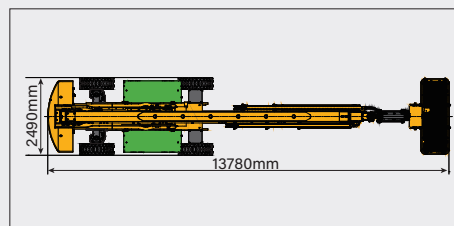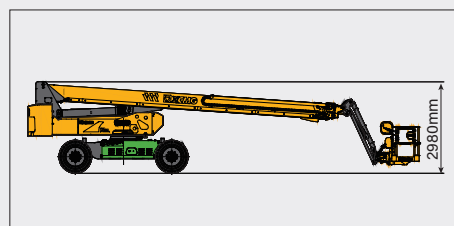

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.