



SOLID
TO SUCCEED

ARTICULATED BOOM LIFT XGA26K

Standard Configuration

Work Area

- Tri-Entry Platform

Power

- Cold Start Components
- Engine Intake Air Pre-Filter Assembly
- Engine Condition Monitoring And Start Protection Device

Drive

- 4-Wheel Drive
- Axle Oscillation

Safe

- Descent And Motion Alarm
- Tilt Alarm
- Horn With Adjustable Volume
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- Axle Oscillation Pressure Detection System
- 4-Wheel Braking System

Other Features

- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Full-Speed Traveling Motor
- Telematics Front-End Interface
- Hostile Environment Package
- Thumb Rocker Steering
- Anti-Entrapment System



Working height
26.6 meters



Lift capacity
256Kg



Diesel
power



Optional configuration

- Cummins Euro III Engine
- Tool Tray
- Platform Power
- Air Line
- Mechanical Anti-Entrapment Device
- Platform Height Limitation Anti-Collision Device
- Platform Half-Mesh
- Working Light Assembly
- Fall Arrest Assembly
- Platform Anti-Squeeze Auxiliary Rail
- Aircraft Protection Device
- Rubber Buffer Protection Device

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com


XGA26K





SOLID
TO SUCCEED

Articulated Boom Lift-Engine Powered



Item		Metric
Dimensions		
Overall Dimension - Stowed	Length	11760mm
	Width	2490mm
	Height	2950mm
Overall Dimension - Transported	Length	11100mm
	Width	2490mm
	Height	3000mm
Platform Dimensions	Length	2400mm
	Width	900mm
	Height	1150mm
Wheelbase		3000mm
Jib Length		1850mm
Min. Ground Clearance		380mm
Performance		
Max. Working Height		26.6m
Max. Platform Height		24.6m
Max. Outreach		19.5m
Max. Up And Over Clearance		8.7m
Max. Down Reach Depth		5.2m
Max. Lift Capacity		256kg
Max. Platform Occupancy		2
Max. Chassis Allowable Angle		X-4° / Y-4°
1St Boom Luffing Range		-1°~ 70°
2Nd Boom Luffing Range		-35°~ 68°
Fly Boom Luffing Range		-65°~ 70°
Turntable Rotation		360°
Platform Rotation		160°
Machine Weight		18100kg
Driving Speed (Stowed)		5km/h
Driving Speed (Raised Or Extended)		0.6 km/h
Min. Turning Radius (Inside/Outside)		2355mm/4625mm
Turntable Tailswing (Stowed)		2255mm
Turntable Tailswing (Working)		1330mm
Max. Gradeability (Counterweight Uphill)		45% (24°)
Power Source		
Control		12 V DC Proportional Control
Emergency Power Supply		12V/200Ah
Engine Model		Yuchai YCF3065-T482
Engine Power / Rpm		48kW(2400r/min)
Max. Engine Torque		260N · m(1400r/min-1700r/min)
Engine Emission Standard		Stage IV
Hydraulic Oil Tank Capacity (Effective Volume)		135L
Fuel Tank Capacity		180L
Tire		
Tire Size		φ1017mm×450mm
Tire Ground Pressure		8.58kg/cm ²
Driving Wheels		4
Braking Wheels		4
Steering Wheels		4

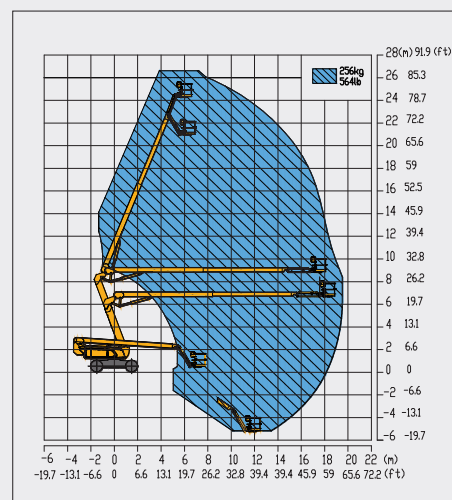

Stowed

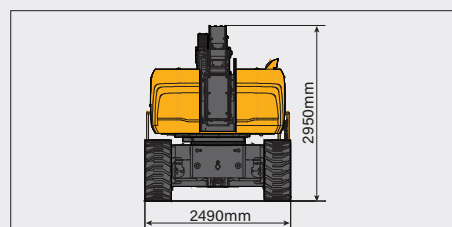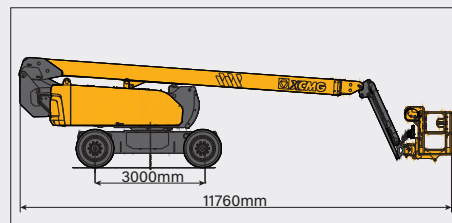

Trans

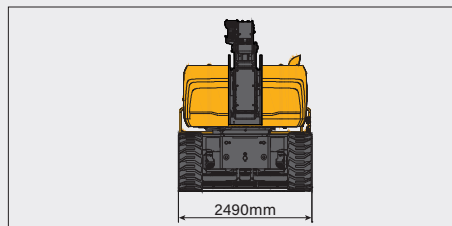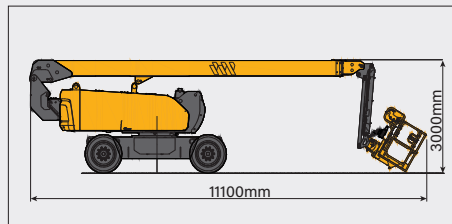

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.