



TELEHANDLERS

XT4514K

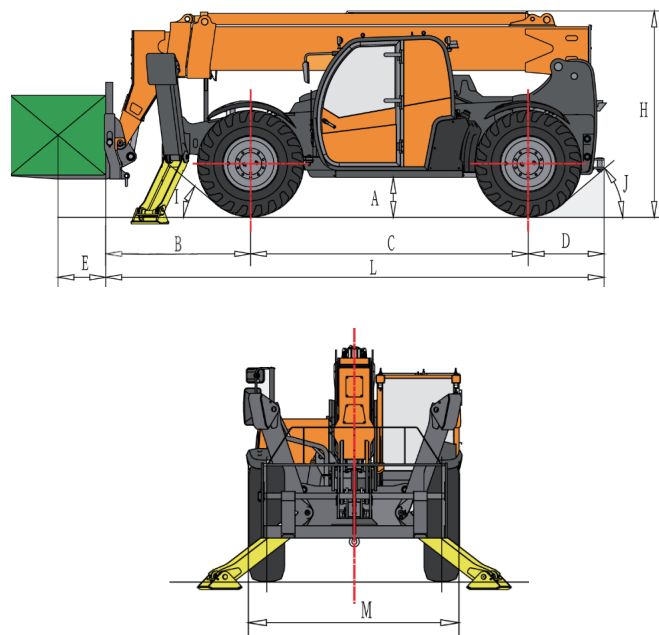

LOAD CHART

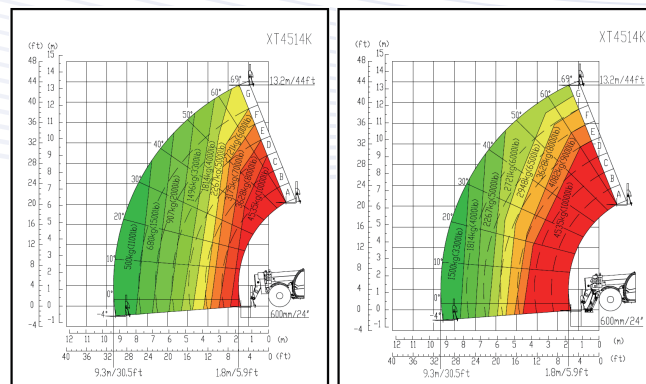

STATIC DIMENSION

Dimensions		Metric
Min. Ground Clearance	A	430mm
Front Overhang	B	1857mm
Wheel Base	C	3490mm
Rear Overhang	D	955mm
Load Center Distance	E	600mm
Overall Length	L	6267mm
Overall Height	H	2517mm
Overall Width	M	2312mm
Approach Angle	I	40°
Departure Angle	J	40°

XT4514K

► PARAMETER

Parameter	Metric
Dimension	
Overall Length	6267mm
Overall Width	2350mm
Overall Height	2540mm
Wheel Base	3490mm
Track Width	1950mm
Min. Ground Clearance	430mm
Fork Dimensions	1200×150×50 mm
Weight and tires	
Machine Weight (With Fork)	12200 kg
Tire Specification	14.00-24
Performance	
Rated Load	4535 kg
Load Center Distance	600 mm
Max. Lifting Height (To Upper Plane Of Forks)	13.2 m
Lift Capacity At Max. Lifting Height	2948 kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires)	9.3 m
Lift Capacity At Max. Outreach	1496kg
Boom Lifting Time	≤18s
Boom Lowering Time	≤18s
Boom Extension Time	≤28s
Boom Retraction Time	≤28s
Fork Dump Time	≤8s
Fork Crowd Time	≤8s
Boom Lifting Range	-4°~69°
Fork Tilt Angle Range (Boom Being Horizontal)	-14°~112°
Max. Travel Speed	32 km/h
Max. Traction Force	≥55 kN
Min. Turning Radius	≤4200 mm
Frame Leveling Angle	±10°
Power System	
Power Source	Diesel Engine
Engine Brand/Model	Cummins QSF3.8
Number Of Cylinders	4
Engine Rated Power	97 kw
Emissions	Stage III
Rated Speed	2200r/min
Max. Torque @ Rpm	488N.m@1600RPM
Fuel Tank Capacity	130L
Transmission System	
Numbers Of Gears (Forward/Reverse)	2/2
Transmission Type	Hydrostatic Transmission
Steer Mode	4-Wheel Steer
Drive Mode	4×4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28Mpa
Hydraulic System Flow	150L/min
Hydraulic Tank Capacity	145 L

► STANDARD CONFIGURATION

- Cab
- FOPS And ROPS Certification
- Air Conditioning
- Adjustable Steering Wheel
- 7-Inch Display
- Radio
- Bluetooth Call
- 24 V Power Outlet
- USB Charging Port
- Top Sun Visor
- Interior Rearview Mirror
- Reversing Camera
- Front Wiper
- Top Wiper
- Fire Extinguisher
- Revolving Alarm Light
- Adjustable Suspension Seat
- Joystick Shift
- Reversing Buzzer
- Cup Holder
- Emergency Hammer
- Seat Belt Unfastened Detection Function
- Multifunctional Proportional Handle
- Emergency Stop Switch
- Power Transmission
- 4-Wheel Drive
- 3 Steering Modes
- Rear Axle Center Position Display
- Front Axle Limited-Slip Differential
- Engine Inlet Heating
- Wet Brake System
- Suspension Damping System
- Outrigger Position Detection Function
- Electrical System
- Torque Limiter
- Working Envelope Display
- Boom-Mounted Work Light
- Cab Front And Rear Work Lights
- Seat Belt Unbuckled Alarm
- Hydraulic System
- Open-Center Load Sensing System
- Boom Tip Damping System
- Automatic Fork Leveling
- Others
- Safety Rod
- Rear Tow Hitch

► OPTIONAL ATTACHMENTS

- Fork (4t,1.2m)
- Fork
- Bucket
- Hook
- Brick Clamp
- Bale Clamp (Soft)
- Log Clamp
- Snow Plow Blade
- Angled Sweeper