



TELEHANDLERS

XT5017K

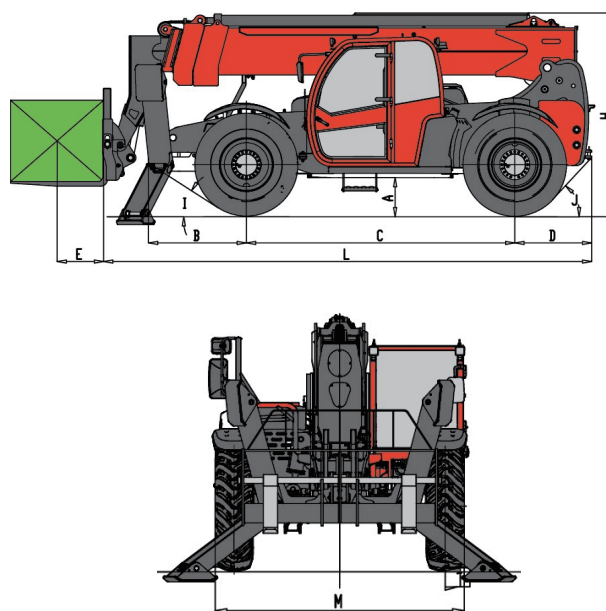

► LOAD CHART

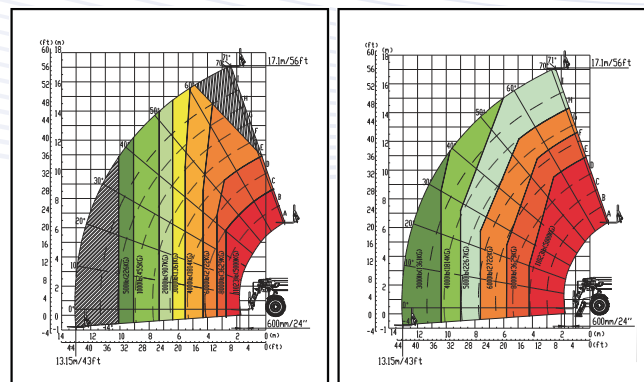

► STATIC DIMENSION

Dimensions		Metric
Min. Ground Clearance	A	450mm
Front Overhang	B	1586mm
Wheel Base	C	3490mm
Rear Overhang	D	1044mm
Load Center Distance	E	600mm
Overall Length	L	6120mm
Overall Height	H	2540mm
Overall Width	M	2560mm
Approach Angle	I	31°
Departure Angle	J	44.5°

XT5017K

► PARAMETER

Parameter	Metric
Dimension	
Overall Length	6120 mm
Overall Width	2560 mm
Overall Height	2540 mm
Wheel Base	3490 mm
Track Width	2180 mm
Min. Ground Clearance	450 mm
Fork Dimensions	1200×150×60 mm
Weight and tires	
Machine Weight (With Fork)	15800 kg
Tire Specification	14.00-24
Performance	
Rated Load	5000 kg
Load Center Distance	600 mm
Max. Lifting Height (To Upper Plane Of Forks)	17.1 m
Lift Capacity At Max. Lifting Height	2267 kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires)	13.15 m
Lift Capacity At Max. Outreach	1360 kg
Boom Lifting Time	≤ 18 s
Boom Lowering Time	≤ 18 s
Boom Extension Time	≤ 23 s
Boom Retraction Time	≤ 22 s
Fork Dump Time	≤ 8 s
Fork Crowd Time	≤ 8 s
Boom Lifting Range	-4° ~ 71°
Fork Tilt Angle Range (Boom Being Horizontal)	-14° ~ 111°
Max. Travel Speed	32 km/h
Max. Traction Force	≥ 65 kN
Min. Turning Radius	≤ 4300 mm
Frame Leveling Angle	± 10°
Power System	
Power Source	Diesel Engine
Engine Brand/Model	Cummins QSF3.8
Number Of Cylinders	4
Engine Rated Power	97 kw
Emissions	Stage III
Rated Speed	2200r/min
Max. Torque @ Rpm	488N.m@1600RPM
Fuel Tank Capacity	140L
Transmission System	
Numbers Of Gears (Forward/Reverse)	4/3
Transmission Type	Hydraulic Transmission
Steer Mode	4-Wheel Steer
Drive Mode	4×4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28Mpa
Hydraulic System Flow	150L/min
Hydraulic Tank Capacity	140L

► STANDARD CONFIGURATION

- Cab
- FOPS And ROPS Certification
- Air Conditioning
- Adjustable Steering Wheel
- 7-Inch Display
- Radio
- Bluetooth Call
- 24 V Power Outlet
- USB Charging Port
- Top Sun Visor
- Interior Rearview Mirror
- Reversing Camera
- Front Wiper
- Top Wiper
- Fire Extinguisher
- Revolving Alarm Light
- Adjustable Suspension Seat
- Steering Column Shift
- Reversing Buzzer
- Cup Holder
- Emergency Hammer
- Seat Belt Unfastened Detection Function
- Multifunctional Proportional Handle
- Emergency Stop Switch
- Power Transmission
- 4-Wheel Drive
- 3 Steering Modes
- Rear Axle Center Position Display
- Front Axle Limited-Slip Differential
- Engine Inlet Heating
- Wet Brake System
- Suspension Damping System
- Outrigger Position Detection Function
- Electrical System
- Torque Limiter
- Working Envelope Display
- Boom-Mounted Work Light
- Cab Front And Rear Work Lights
- Seat Belt Unbuckled Alarm
- Hydraulic System
- Open-Center Load Sensing System
- Boom Tip Damping System
- Automatic Fork Leveling
- Others
- Safety Rod
- Rear Tow Hitch

► OPTIONAL CONFIGURATION

- Fuel Oil Heating System
- Front Falling Object Guard
- Boom Attachment Harness
- Foam-Filled Tires

► OPTIONAL ATTACHMENTS

- Fork (5.5t,1.2m)
- Fork
- Bucket
- Hook
- Brick Clamp
- Bale Clamp (Soft)
- Log Clamp
- Snow Plow Blade
- Angled Sweeper