



TELEHANDLERS

XT4014K

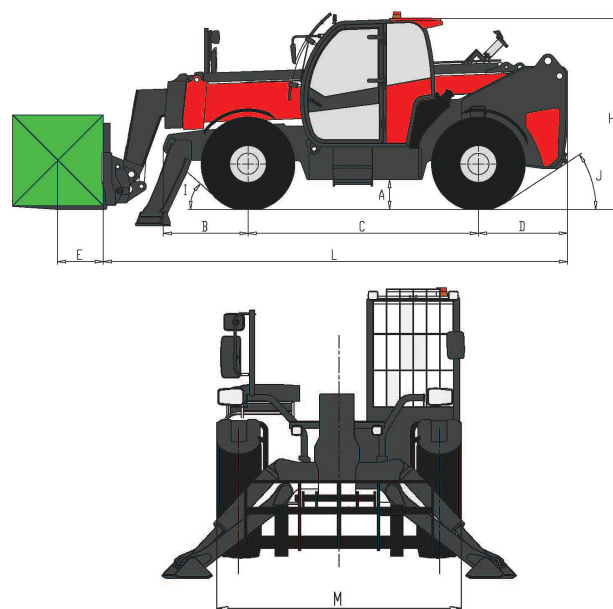

► LOAD CHART

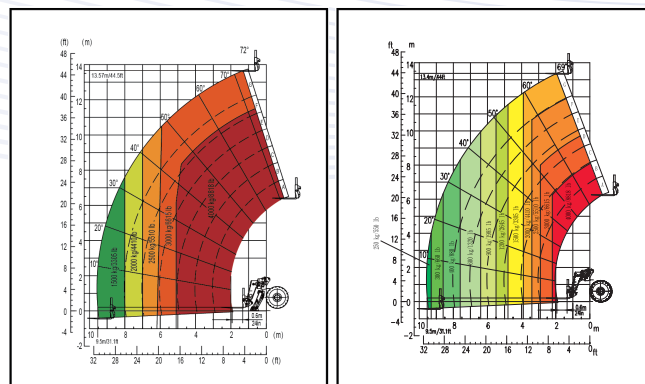

► STATIC DIMENSION

Dimensions		Metric
Min. Ground Clearance	A	370mm
Front Overhang	B	1120mm
Wheel Base	C	3050mm
Rear Overhang	D	1210mm
Load Center Distance	E	600mm
Overall Length	L	6160mm
Overall Height	H	2550mm
Overall Width	M	2420mm
Approach Angle	I	40°
Departure Angle	J	33°

XT4014K

► PARAMETER

Parameter	Metric
Dimension	
Overall Length	6160 mm
Overall Width	2420 mm
Overall Height	2550 mm
Wheel Base	3050 mm
Track Width	1960 mm
Min. Ground Clearance	370 mm
Fork Dimensions	1200×122×50 mm
Weight and tires	
Machine Weight (With Fork)	11200 kg
Tire Specification	400/80-R24
Performance	
Rated Load	4000 kg
Load Center Distance	600 mm
Max. Lifting Height (To Upper Plane Of Forks)	13.57 m
Lift Capacity At Max. Lifting Height	3000 kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires)	9.5 m
Lift Capacity At Max. Outreach	1500 kg
Boom Lifting Time	≤ 18 s
Boom Lowering Time	≤ 16 s
Boom Extension Time	≤ 23 s
Boom Retraction Time	≤ 22 s
Fork Dump Time	≤ 5 s
Fork Crowd Time	≤ 4 s
Boom Lifting Range	-3° ~ 72°
Fork Tilt Angle Range (Boom Being Horizontal)	-12° ~ 114°
Max. Travel Speed	≥ 27 km/h
Max. Traction Force	≥ 60kN
Min. Turning Radius	≤ 4200 mm
Frame Leveling Angle	± 10°
Power System	
Power Source	Diesel Engine
Engine Brand/Model	Cummins QSF3.8
Number Of Cylinders	4
Engine Rated Power	73Kw
Emissions	Stage III
Rated Speed	2200r/min
Max. Torque @ Rpm	420N.m@1320RPM
Fuel Tank Capacity	135L
Transmission System	
Numbers Of Gears (Forward/Reverse)	2/2
Transmission Type	Hydrostatic Transmission
Steer Mode	4-Wheel Steer
Drive Mode	4×4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28Mpa
Hydraulic System Flow	150L/min
Hydraulic Tank Capacity	158L

► STANDARD CONFIGURATION

- Cab
- FOPS And ROPS Certification
- Air Conditioning
- Adjustable Steering Wheel
- 7-Inch Main Display
- Radio
- 12 V Power Outlet
- Top Sun Visor
- Interior Rearview Mirror
- Exterior Rearview Mirror
- Reversing Camera
- Front Wiper
- Rear Wiper
- Top Wiper
- Fire Extinguisher
- Revolving Alarm Light
- Adjustable Suspension Seat
- Emergency Hammer
- Emergency Stop Switch
- Cup Holder
- Reversing Buzzer
- Multifunctional Proportional Handle
- Seat Belt Unfastened Detection Function
- Power Transmission
- 4-Wheel Drive
- 3 Steering Modes
- Rear Axle Center Position Display
- Front Axle Limited-Slip Differential
- Outtrigger Position Detection Function
- Wet Brake System
- Engine Inlet Heating
- Electrical System
- Torque Limiter
- Working Envelope Display
- Boom-Mounted Work Light
- Cab Front And Rear Work Lights
- Seat Belt Unbuckled Alarm
- Hydraulic System
- Open-Center Load Sensing System
- Boom Tip Damping System
- Automatic Fork Leveling
- Others
- Fan Reverse Dust Removal
- Safety Rod
- Manual Towing Hook

► OPTIONAL CONFIGURATION

- Front Falling Object Guard
- Phone Stand
- Foam-Filled Tires
- Attachment Electrical

► OPTIONAL ATTACHMENTS

- Fork (4t,1.2m)
- Bucket
- Hook
- Brick Clamp
- Bale Clamp (Soft)
- Log Clamp
- Snow Plow Blade
- Angled Sweeper