
XCMG SOLID TO SUCCEED

TELEHANDLERS
XT23010K





LOAD CHART

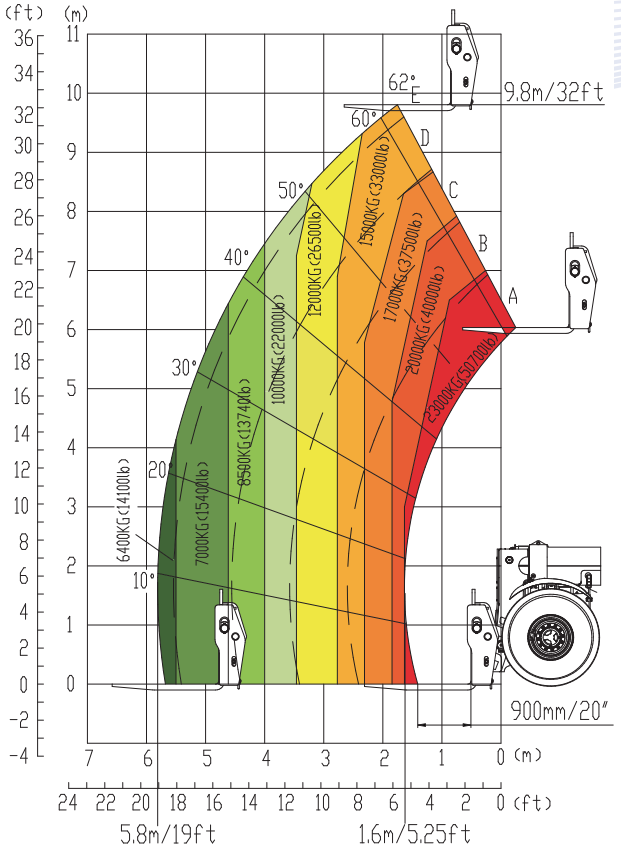

STATIC DIMENSION

Dimensions		Metric
Min. Ground Clearance	A	435mm
Front Overhang	B	—
Wheel Base	C	4000mm
Rear Overhang	D	1473mm
Load Center Distance	E	900mm
Overall Length	L	6823mm
Overall Height	H	3058mm
Overall Width	M	2800mm
Approach Angle	I	—
Departure Angle	J	30.8°

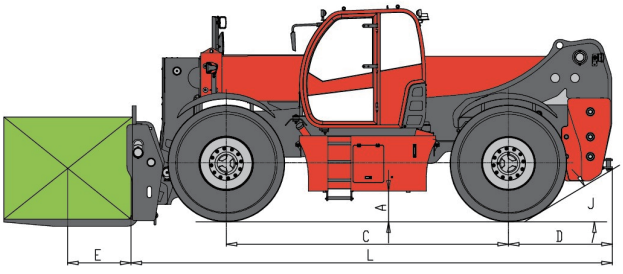



XT23010K

PARAMETER

Parameter	Metric
Dimension	
Overall Length	6823 mm
Overall Width	2800 mm
Overall Height	3058 mm
Wheel Base	4000 mm
Track Width	2315 mm
Min. Ground Clearance	435 mm
Fork Dimensions	1800×250×100 mm
Weight and tires	
Machine Weight (With Fork)	32800 kg
Tire Specification	18.00 R25
Performance	
Rated Load	23000 kg
Load Center Distance	900 mm
Max. Lifting Height (To Upper Plane Of Forks)	9.8 m
Lift Capacity At Max. Lifting Height	15000 kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires)	5.8 m
Lift Capacity At Max. Outreach	6400 kg
Boom Lifting Time	≤33s
Boom Lowering Time	≤25s
Boom Extension Time	≤25s
Boom Retraction Time	≤22s
Fork Dump Time	≤10s
Fork Crowd Time	≤8s
Boom Lifting Range	-0°～62°
Fork Tilt Angle Range (Boom Being Horizontal)	-12°～105°
Max. Travel Speed	25 km/h
Max. Traction Force	≥147 kN
Min. Turning Radius	≤5700 mm
Frame Leveling Angle	±10°
Power System	
Power Source	Diesel Engine
Engine Brand/Model	Cummins QSF4.5
Number Of Cylinders	4
Engine Rated Power	125Kw
Emissions	Stage IV
Rated Speed	2200 r/min
Max. Torque @ Rpm	670N.m@1500RPM
Fuel Tank Capacity	300 L
Transmission System	
Numbers Of Gears (Forward/Reverse)	2/2
Transmission Type	Hydrostatic Transmission
Steer Mode	4-Wheel Steer
Drive Mode	4×4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	35 Mpa
Hydraulic System Flow	220 L/min
Hydraulic Tank Capacity	320 L

STANDARD CONFIGURATION

- **Cab**
- Air Conditioning
- Adjustable Steering Wheel
- 7-Inch Display
- Radio
- Bluetooth Call
- 24 V Power Outlet
- Cigarette Lighter
- Top Sun Visor
- Front Sun Visor
- Interior Rearview Mirror
- Reversing Camera
- Front Wiper
- Top Wiper
- Fire Extinguisher
- Revolving Alarm Light
- Adjustable Suspension Seat
- Steering Column Shift
- Reversing Buzzer
- Cup Holder
- Emergency Hammer
- Seat Belt Unfastened Detection Function
- Multifunctional Proportional Handle
- Emergency Stop Switch
- Horn
- **Power Transmission**
- 4-Wheel Drive
- 3 Steering Modes
- Front And Rear Axles Limited-Slip Differential
- Engine Inlet Heating
- Wet Brake System
- **Electrical System**
- Anti-Tilt System
- Working Envelope Display
- Working Load Display
- Boom-Mounted Work Light
- Cab Front And Rear Work Lights
- Seat Belt Unbuckled Alarm
- Three-Color Alarm Light
- **Hydraulic System**
- Open-Center Load Sensing System
- Boom Tip Damping System
- Automatic Fork Leveling
- **Others**
- Safety Rod
- Manual Towing Hook
- Manual Centralized Lubrication

OPTIONAL CONFIGURATION

- Falling Object Protective Structure
- Coolant Heating System
- Wheel-Nut Indicators

OPTIONAL ATTACHMENTS

- Fork（18t,1.2m)
- Bucket
- Hook
- Hydraulic Cylinder Clamp