

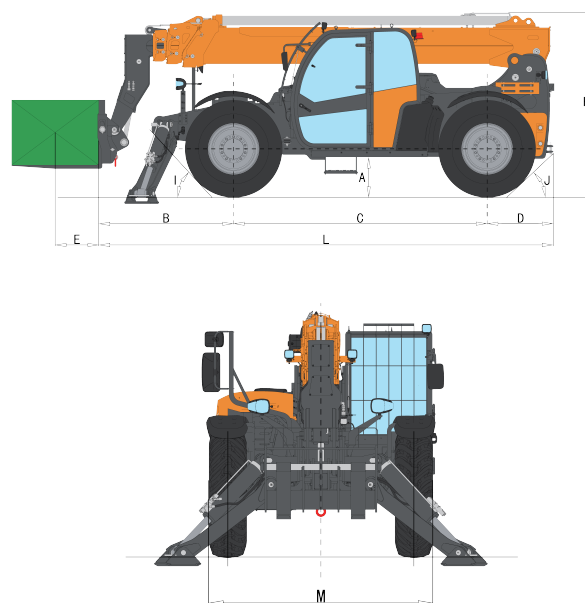


TELEHANDLERS

XT4517K

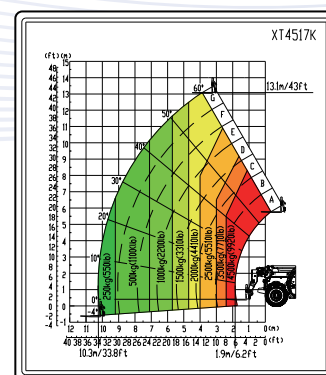

► LOAD CHART

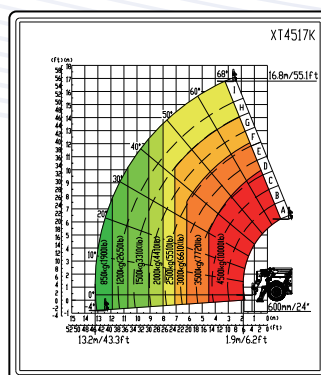

► STATIC DIMENSION

Dimensions		Metric
Min. Ground Clearance	A	430 mm
Front Overhang	B	1857 mm
Wheel Base	C	3490 mm
Rear Overhang	D	925 mm
Load Center Distance	E	600 mm
Overall Length	L	6272 mm
Overall Height	H	2475 mm
Overall Width	M	2360 mm
Approach Angle	I	40°
Departure Angle	J	40°

XT4517K

► PARAMETER

Parameter	Metric
Dimension	
Overall Length	6272 mm
Overall Width	2360 mm
Overall Height	2475 mm
Wheel Base	3490 mm
Track Width	1920 mm
Min. Ground Clearance	430 mm
Fork Dimensions	1200×150×50 mm
Weight and tires	
Machine Weight (With Fork)	12580 KG
Tire Specification	14.00-24
Performance	
Rated Load	4500 kg
Load Center Distance	600 mm
Max. Lifting Height (To Upper Plane Of Forks)	16.8 m
Lift Capacity At Max. Lifting Height	2500 kg
Max. Outreach (Boom Level, Load Center To Front Tire Face)	13.2 m
Lift Capacity At Max. Outreach	850 kg
Boom Lifting Time	≤ 18 s
Boom Lowering Time	≤ 15 s
Boom Extension Time	≤ 19 s
Boom Retraction Time	≤ 15 s
Fork Dump Time	≤ 5 s
Fork Crowd Time	≤ 5 s
Boom Lifting Range	-4° ~ 68°
Fork Tilt Angle Range (Boom Being Horizontal)	-14° ~ 112°
Max. Travel Speed	32 km/h
Max. Traction Force	≥ 55 kN
Minimum Turning Radius (Outside of Tire)	≤ 4200 mm
Frame Leveling Angle	± 10°
Power System	
Power Source	Diesel Engine
Engine Brand/Model	Cummins QSF3.8
Number Of Cylinders	4
Engine Rated Power	97 kw
Emissions	Stage III
Rated Speed	2200 r/min
Max. Torque @ Rpm	488N.m@1600RPM
Fuel Tank Capacity	130L
Transmission System	
Numbers Of Gears (Forward/Reverse)	2/2
Transmission Type	Hydrostatic Transmission
Steer Mode	4-Wheel Steer
Drive Mode	4x4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28 Mpa
Hydraulic System Flow	150 L/min
Hydraulic Tank Capacity	145 L

► STANDARD CONFIGURATION

- Cab
 - FOPS And ROPS Certification
 - Air Conditioning
 - Adjustable Steering Wheel
 - 7-Inch Display
 - Radio
 - Bluetooth Call
 - 24 V Power Outlet
 - USB Charging Port
 - Top Sun Visor
 - Interior Rearview Mirror
 - Reversing Camera
 - Front Wiper
 - Top Wiper
 - Fire Extinguisher
 - Revolving Alarm Light
 - Adjustable Suspension Seat
 - Joystick Shift
 - Reversing Buzzer
 - Cup Holder
 - Emergency Hammer
 - Seat Belt Unfastened Detection Function
 - Multifunction Proportional Joystick
 - Emergency Stop Switch
- Power Transmission
 - 4-Wheel Drive
 - Three Steering Modes (2WS / 4WS / Crab)
 - Rear Axle Center Position Display
 - Limited Slip Differential on Front Axle
 - Engine Inlet Heating
 - Wet Brake System
 - Suspension Damping System
 - Outrigger Position Detection Function
- Electrical System
 - Load Moment Indicator
 - Working Envelope Display
 - LED Work Lights On Boom
 - LED work lights on cab
 - Seat Belt Unbuckled Alarm
- Hydraulic System
 - Open-Center Load Sensing System
 - Boom Soft-stop Function
 - Automatic Fork Leveling
- Others
 - Safety Strut
 - Rear Tow Hitch

► OPTIONAL ATTACHMENTS

- Fork