

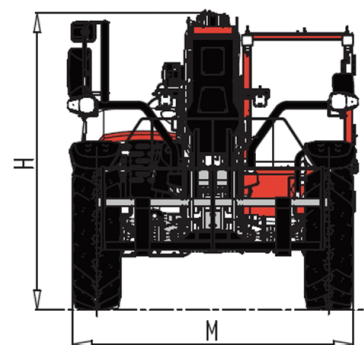


TELEHANDLERS

XT8010K

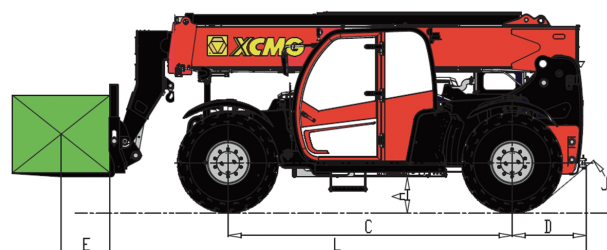

► LOAD CHART

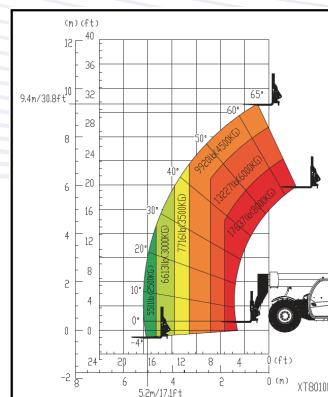

► STATIC DIMENSION

Dimensions		Metric
Min. Ground Clearance	A	440mm
Front Overhang	B	—
Wheel Base	C	3800mm
Rear Overhang	D	1112mm
Load Center Distance	E	600mm
Overall Length	L	6334mm
Overall Height	H	2560mm
Overall Width	M	2650mm
Approach Angle	I	—
Departure Angle	J	41°

XT8010K

► PARAMETER

Parameter	Metric
Dimension	
Overall Length	6334mm
Overall Width	2650mm
Overall Height	2560mm
Wheel Base	3800mm
Track Width	2190mm
Min. Ground Clearance	440mm
Fork Dimensions	1200×175×70mm
Weight and tires	
Machine Weight (With Fork)	14300 kg
Tire Specification	14.00-24
Performance	
Rated Load	8000kg
Load Center Distance	600mm
Max. Lifting Height (To Upper Plane Of Forks)	9.4m
Lift Capacity At Max. Lifting Height	4500kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires)	5.2m
Lift Capacity At Max. Outreach	2500kg
Boom Lifting Time	≤15s
Boom Lowering Time	≤10s
Boom Extension Time	≤13s
Boom Retraction Time	≤11s
Fork Dump Time	≤8s
Fork Crowd Time	≤8s
Boom Lifting Range	-4°~65°
Fork Tilt Angle Range (Boom Being Horizontal)	-14°~112°
Max. Travel Speed	32 km/h
Max. Traction Force	≥50kN
Min. Turning Radius	≤4300mm
Frame Leveling Angle	±10°
Power System	
Power Source	Diesel Engine
Engine Brand/Model	Cummins QSF3.8
Number Of Cylinders	4
Engine Rated Power	97 kw
Emissions	Stage III
Rated Speed	2200r/min
Max. Torque @ Rpm	488N.m@1600RPM
Fuel Tank Capacity	140L
Transmission System	
Numbers Of Gears (Forward/Reverse)	4/3
Transmission Type	Hydraulic Transmission
Steer Mode	4-Wheel Steer
Drive Mode	4×4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28Mpa
Hydraulic System Flow	150L/min
Hydraulic Tank Capacity	140L

► STANDARD CONFIGURATION

- Cab
- FOPS And ROPS Certification
- Air Conditioning
- Adjustable Steering Wheel
- 7-Inch Display
- Radio
- Bluetooth Call
- 24 V Power Outlet
- USB Charging Port
- Top Sun Visor
- Interior Rearview Mirror
- Reversing Camera
- Front Wiper
- Top Wiper
- Fire Extinguisher
- Revolving Alarm Light
- Adjustable Suspension Seat
- Steering Column Shift
- Reversing Buzzer
- Cup Holder
- Emergency Hammer
- Seat Belt Unfastened Detection Function
- Multifunctional Proportional Handle
- Emergency Stop Switch
- Power Transmission
- 4-Wheel Drive
- 3 Steering Modes
- Rear Axle Center Position Display
- Front Axle Limited-Slip Differential
- Engine Inlet Heating
- Wet Brake System
- Suspension Damping System
- Electrical System
- Anti-Tilt System
- Working Envelope Display
- Working Load Display
- Boom-Mounted Work Light
- Cab Front And Rear Work Lights
- Seat Belt Unbuckled Alarm
- Hydraulic System
- Open-Center Load Sensing System
- Boom Tip Damping System
- Automatic Fork Leveling
- Others
- Rear Tow Hitch

► OPTIONAL CONFIGURATION

- Fuel Oil Heating System
- Boom Attachment Harness

► OPTIONAL ATTACHMENTS

- Fork (8t,1.2m)
- Bucket
- Brick Clamp
- Bale Clamp (Soft)
- Log Clamp
- Snow Plow Blade
- Angled Sweeper