



# TELEHANDLERS

## XT5517K

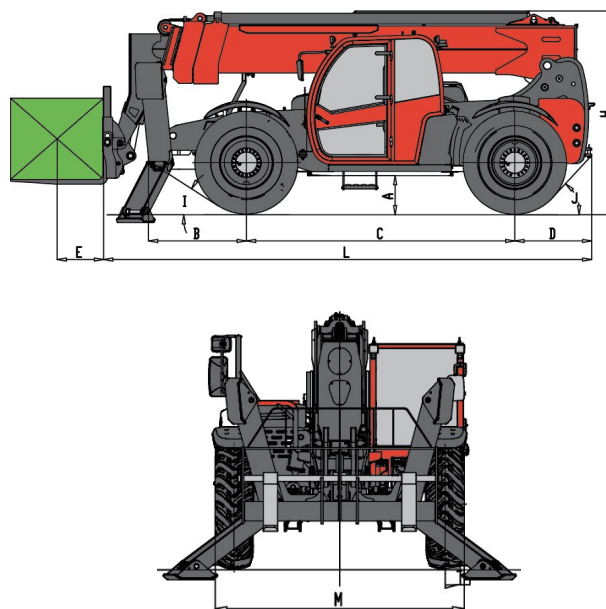

### ► LOAD CHART

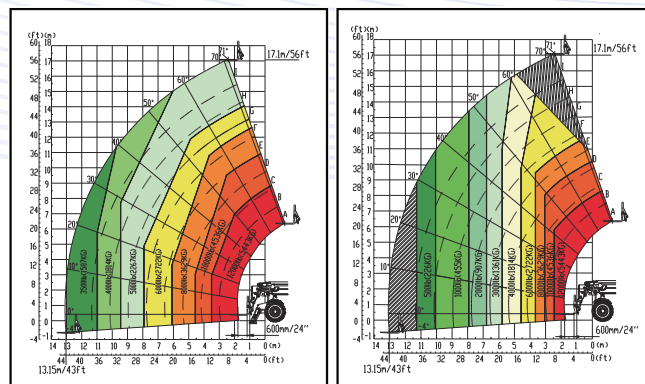

### ► STATIC DIMENSION

| Dimensions            |   | Metric |
|-----------------------|---|--------|
| Min. Ground Clearance | A | 450mm  |
| Front Overhang        | B | 1586mm |
| Wheel Base            | C | 3490mm |
| Rear Overhang         | D | 1044mm |
| Load Center Distance  | E | 600mm  |
| Overall Length        | L | 6120mm |
| Overall Height        | H | 2540mm |
| Overall Width         | M | 2560mm |
| Approach Angle        | I | 31°    |
| Departure Angle       | J | 44.5°  |

# XT5517K

## ► PARAMETER

| Parameter                                                                             | Metric                 |
|---------------------------------------------------------------------------------------|------------------------|
| <b>Dimension</b>                                                                      |                        |
| Overall Length                                                                        | 6120 mm                |
| Overall Width                                                                         | 2560 mm                |
| Overall Height                                                                        | 2540 mm                |
| Wheel Base                                                                            | 3490 mm                |
| Track Width                                                                           | 2180 mm                |
| Min. Ground Clearance                                                                 | 450 mm                 |
| Fork Dimensions                                                                       | 1200×150×60 mm         |
| <b>Weight and tires</b>                                                               |                        |
| Machine Weight (With Fork)                                                            | 16782 kg               |
| Tire Specification                                                                    | 14.00-24               |
| <b>Performance</b>                                                                    |                        |
| Rated Load                                                                            | 5443 kg                |
| Load Center Distance                                                                  | 600 mm                 |
| Max. Lifting Height (To Upper Plane Of Forks)                                         | 17.1m                  |
| Lift Capacity At Max. Lifting Height                                                  | 2267 kg                |
| Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires) | 13.15m                 |
| Lift Capacity At Max. Outreach                                                        | 1587 kg                |
| Boom Lifting Time                                                                     | ≤ 18 s                 |
| Boom Lowering Time                                                                    | ≤ 18 s                 |
| Boom Extension Time                                                                   | ≤ 23 s                 |
| Boom Retraction Time                                                                  | ≤ 22 s                 |
| Fork Dump Time                                                                        | ≤ 8 s                  |
| Fork Crowd Time                                                                       | ≤ 8 s                  |
| Boom Lifting Range                                                                    | -4° ~ 71°              |
| Fork Tilt Angle Range (Boom Being Horizontal)                                         | -14° ~ 111°            |
| Max. Travel Speed                                                                     | 32 km/h                |
| Max. Traction Force                                                                   | ≥ 65 kN                |
| Min. Turning Radius                                                                   | ≤ 4300 mm              |
| Frame Leveling Angle                                                                  | ± 10°                  |
| <b>Power System</b>                                                                   |                        |
| Power Source                                                                          | Diesel Engine          |
| Engine Brand/Model                                                                    | Cummins QSF3.8         |
| Number Of Cylinders                                                                   | 4                      |
| Engine Rated Power                                                                    | 97 kw                  |
| Emissions                                                                             | Stage III              |
| Rated Speed                                                                           | 2200r/min              |
| Max. Torque @ Rpm                                                                     | 488N.m@1600RPM         |
| Fuel Tank Capacity                                                                    | 140L                   |
| <b>Transmission System</b>                                                            |                        |
| Numbers Of Gears (Forward/Reverse)                                                    | 4/3                    |
| Transmission Type                                                                     | Hydraulic Transmission |
| Steer Mode                                                                            | 4-Wheel Steer          |
| Drive Mode                                                                            | 4×4                    |
| <b>Hydraulic System</b>                                                               |                        |
| Hydraulic Pump Type                                                                   | Plunger Pump           |
| Hydraulic System Pressure                                                             | 28Mpa                  |
| Hydraulic System Flow                                                                 | 150L/min               |
| Hydraulic Tank Capacity                                                               | 140L                   |

## ► STANDARD CONFIGURATION

- Cab
- FOPS And ROPS Certification
- Air Conditioning
- Adjustable Steering Wheel
- 7-Inch Display
- Radio
- Bluetooth Call
- 24 V Power Outlet
- USB Charging Port
- Top Sun Visor
- Interior Rearview Mirror
- Reversing Camera
- Front Wiper
- Top Wiper
- Fire Extinguisher
- Revolving Alarm Light
- Adjustable Suspension Seat
- Steering Column Shift
- Reversing Buzzer
- Cup Holder
- Emergency Hammer
- Seat Belt Unfastened Detection Function
- Multifunctional Proportional Handle
- Emergency Stop Switch
- Power Transmission
- 4-Wheel Drive
- 3 Steering Modes
- Rear Axle Center Position Display
- Front Axle Limited-Slip Differential
- Engine Inlet Heating
- Wet Brake System
- Suspension Damping System
- Outtrigger Position Detection Function
- Electrical System
- Torque Limiter
- Working Envelope Display
- Boom-Mounted Work Light
- Cab Front And Rear Work Lights
- Seat Belt Unbuckled Alarm
- Hydraulic System
- Open-Center Load Sensing System
- Boom Tip Damping System
- Automatic Fork Leveling
- Others
- Safety Rod
- Rear Tow Hitch

## ► OPTIONAL CONFIGURATION

- Boom Attachment Harness
- Foam-Filled Tires
- Fuel Oil Heating System
- Front Falling Object Guard

## ► OPTIONAL ATTACHMENTS

- Fork (5.5t,1.2m)
- Bucket
- Bucket
- Hook
- Brick Clamp
- Bale Clamp (Soft)
- Log Clamp
- Snow Plow Blade
- Angled Sweeper