XCMG | SOLID TO SUCCEED

CE

ARTICULATED BOOM LIFT
XGA17ACN

Standard configuration

Work Area
- 1.4m work platform

Drive
- 2-Wheel Drive

Safe
- Descent And Motion Alarm
- Tilt Alarm
- Horn With Adjustable Volume
- Overload Alarm
- Motor Overload Protection
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- 2-Wheel Braking System

Other Features
- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Telematics Front-End Interface
- Hostile Environment Package
- Thumb Rocker Steering
- Anti-Entrapment System
- Platform Power
- Tool Tray

Working height 17meters

Lift capacity 230kg

Electric power



Optional configuration

- Main power source - Battery (Lithium-ion, 51.52V/302Ah)
- Main power source - Charger (Lithium-ion, 48V/60A)
- Air Line
- Mechanical Anti-Entrapment Device
- Platform Height Limitation Anti-Collision Device
- Platform Half-Mesh
- Working Light Assembly

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD


No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XGA17ACN


XCMG SOLID TO SUCCEED


Articulated Boom Lift-Electric

Item		Metric
Dimension		
Overall Dimension - Stowed	Length	6570mm
	Width	1500mm
	Height	1990mm
Overall Dimension - Transported	Length	5000mm
	Width	1500mm
	Height	2200mm
Platform Dimensions	Length	1400mm
	Width	760mm
	Height	1150mm
Wheelbase		1800mm
Jib Length		1240mm
Min. Ground Clearance		135mm
Performance		
Max. Working Height		17m
Max. Platform Height		15m
Max. Outreach		9.7m
Max. Up And Over Clearance		7.2m
Max. Lift Capacity		230kg
Max. Platform Occupancy		2
Max. Chassis Allowable Angle		X-3°/ Y-3°
1St Boom Luffing Range		0°～79°
2Nd Boom Luffing Range		-4°～70°
Fly Boom Luffing Range		-70°~70°
Turntable Rotation		355°Non-continuous
Platform Rotation		160°
Machine Weight		8200 kg
Driving Speed (Stowed)		5km/h
Driving Speed (Raised Or Extended)		0.6km/h
Min. Turning Radius (Inside/Outside)		2000mm/3200mm
Turntable Tailswing (Stowed)		0
Max. Gradeability (Counterweight Uphill)		25% (14°)
Power source		
Control		12 V DC proportional control
Main Power Unit		12 kW/31V （AC）
Auxiliary Power Unit		1.9kW/12 V（DC）
Traveling Motor		3.3 kW/32 V（AC）
Emergency Power Supply		12V/120Ah
Main Power Source - Battery		48 V /400 Ah
Main Power Source - Charger		48V/40A
Hydraulic Oil Tank Capacity (Effective Volume)		30L
Tire		
Tire Size		Φ710mm×305mm
Tire Ground Pressure		11.5 kg/cm²
Driving Wheels		2
Braking Wheels		2
Steering Wheels		2

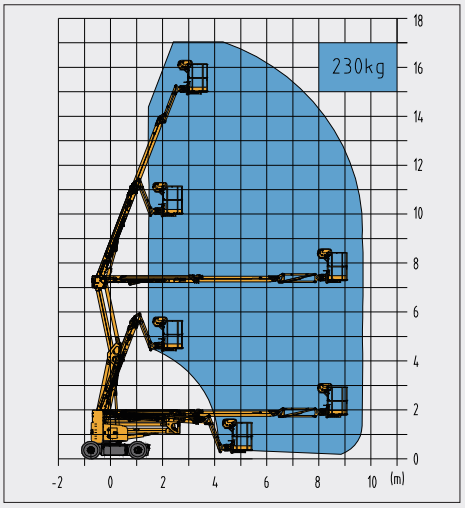



Stowed

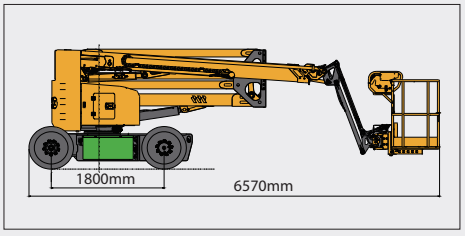

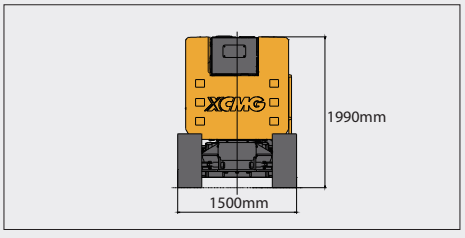

Trans

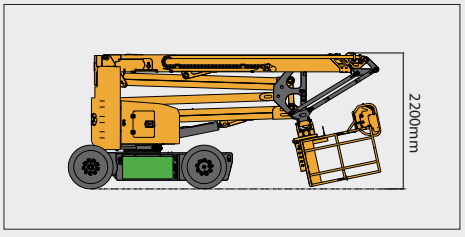

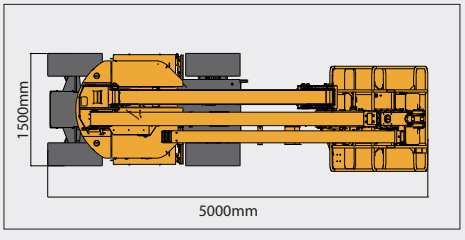

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.