



SOLID
TO SUCCEED



ARTICULATED BOOM LIFT XGA16ACK1

Standard configuration

Power

- 12V DC Auxiliary Power

Drive

- 2-Wheel Drive

Safe

- Descent And Motion Alarm
- Tilt Alarm
- Horn With Adjustable Volume
- Overload Alarm
- Motor Overload Protection
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- 2-Wheel Braking System

Other Features

- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Telematics Front-End Interface
- Anti-Entrapment System
- Platform Power
- Tool Tray



Working height
16 meters



Lift capacity
230Kg



Electric
power



Optional configuration

- Solid Tires (ϕ 696mm×230mm)
- Foam-Filled Tires (ϕ 720mm×225mm)
- Gray Foam-Filled Tires (ϕ 720mm×225mm)
- Fall Arrest Assembly
- Platform Anti-Squeeze Auxiliary Rail
- Platform Half-Mesh
- Air Line
- Mechanical Anti-Entrapment Device
- Working Light Assembly

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XGA16ACK1



SOLID
TO SUCCEED

Articulated Boom Lift-Electric

Item		Metric	
Dimension		Maintenance-free lead-acid battery	Lithium battery
Overall Dimension - Stowed	Length	6560mm	6560mm
	Width	1750mm	1750mm
	Height	2000mm	2000mm
Overall Dimension - Transported	Length	6480mm	6480mm
	Width	1750mm	1750mm
	Height	2400mm	2400mm
Platform Dimensions	Length	1400mm	1400mm
	Width	700mm	700mm
	Height	1150mm	1150mm
Wheelbase		2010mm	2010mm
Jib Length		1420mm	1420mm
Min. Ground Clearance		200mm	200mm

Performance


Max. Working Height	16m	16m
Max. Platform Height	14m	14m
Max. Outreach	8.1m	8.1m
Max. Up And Over Clearance	7.6m	7.6m
Max. Lift Capacity	230kg	230kg
Max. Platform Occupancy	2	2
Max. Chassis Allowable Angle	X-3°/Y-3°	X-3°/Y-3°
1st Boom Luffing Range	-12° ~ 61°	-12° ~ 61°
2nd Boom Luffing Range	-5° ~ 73°	-5° ~ 73°
Fly Boom Luffing Range	-65° ~ 70°	-65° ~ 70°
Turntable Rotation	355°Non-continuous	355°Non-continuous
Platform Rotation	160°	160°
Machine Weight	6700kg	6900kg
Driving Speed (Stowed)	4.8km/h	4.8km/h
Driving Speed (Raised or Extended)	0.6km/h	0.6km/h
Min. Turning Radius (Inside/Outside)	1100mm/3300mm	1100mm/3300mm
Turntable Tailswing (Stowed)	0mm	0mm
Max. Gradeability (Counterweight Uphill)	30% (17°)	30% (17°)

Power source



Control	12 V DC proportional control	12 V DC proportional control
Main Power Unit	6kW/31V (AC)	6kW/31V (AC)
Auxiliary Power Unit	2kW/12V (DC)	2kW/12V (DC)
Traveling Motor	3.3kW/32V (AC)	3.3kW/32V (AC)
Emergency Power Supply	12V/120Ah	12V/120Ah
Main Power Source - Battery	400Ah/48V	302Ah/51.52V
Main Power Source - Charger	48V/40A	48V/60A
Hydraulic Oil Tank Capacity (Effective Volume)	20L	15L

Tire



Tire Size	φ 696mm×230mm	φ 696mm×230mm
Tire Ground Pressure	7.37kg/cm ²	7.37kg/cm ²
Driving Wheels	2	2
Braking Wheels	2	2
Steering Wheels	2	2

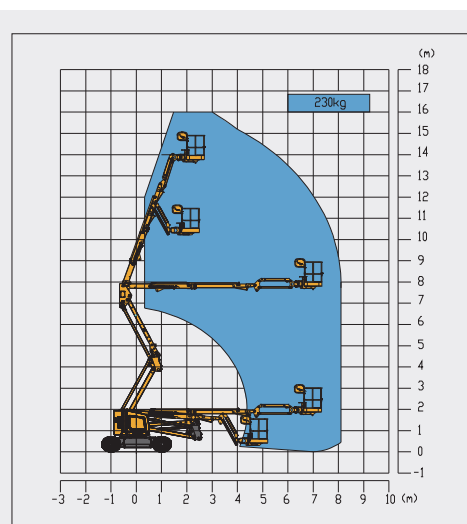

Stowed

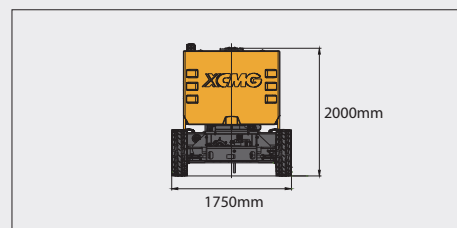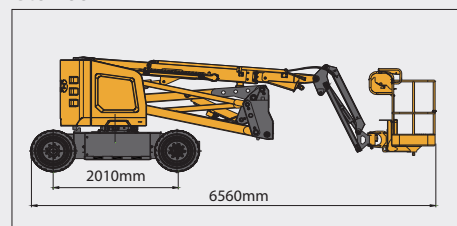

Trans

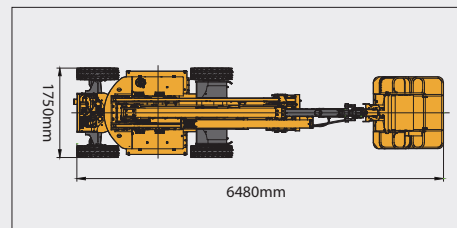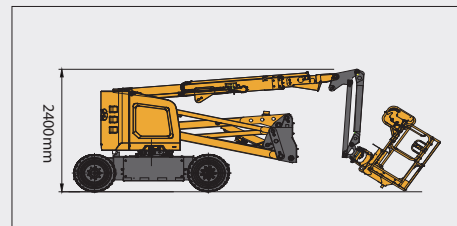

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.