



SOLID
TO SUCCEED



TELESCOPIC BOOM LIFT XGS40K

Standard configuration

Work Area

- Tri-Entry Platform With Side Swing Gate

Power

- 12V DC Auxiliary Power
- Cold Start Components
- Engine Condition Monitoring And Start Protection Device

Drive

- 4-Wheel Steer
- X-Swing Axle

Safe

- Descent And Motion Alarm
- Tilt Alarm
- Chassis Tilt Protection
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- 4-Wheel Braking System
- Horn
- Overload Alarm

Other Features

- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Two-Speed Drive
- Hostile Environment Package
- Hydraulic Oil Cooling System
- Telematics Front-End Interface
- Anti-Entrapment System
- Platform Power
- Tool Tray



Working height
40.2 meters



Lift capacity
300kg/460kg



Diesel
power



Optional configuration

- Hydraulic Generator
- Mechanical Anti-Entrapment Device
- Working Light Assembly
- Platform Half-Mesh
- Air Line
- Fall Arrest Assembly
- Platform Anti-Squeeze Auxiliary Rail
- Aircraft Protection Device
- Platform Height Limitation Anti-Collision Device
- Rubber Buffer Protection Device
- Anemometer
- Foam-Filled Tires (Φ1159mm×445mm)

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XGS40K



SOLID
TO SUCCEED


Telescopic Boom Lift-Engine Powered

Item	Metric	
Dimension		
Overall Dimension - Stowed	Length	14990mm
	Width	2400mm
	Height	2810mm
Overall Dimension - Transported	Length	11800mm
	Width	2300mm
	Height	2810mm
Platform Dimensions	Length	2400mm
	Width	900mm
	Height	1150mm
Wheelbase (Axle Retracted/Axle Extended)		4498mm/4210mm
Overall Width (Axle Retracted/Axle Extended)		2400mm/4169mm
Jib Length		2440mm
Min. Ground Clearance		340mm



Performance		
Max. Working Height	40.2m	
Max. Platform Height	38.2m	
Max. Outreach	23.5m	
Max. Lift Capacity	300kg/460kg	
Max. Platform Occupancy	2/3	
Max. Chassis Allowable Angle	X-5° / Y-5°	
Telescopic Boom Luffing Range	-1.5°~75°	
Fly Boom Luffing Range	-60°~70°	
Turntable Rotation	360°	
Platform Rotation	160°	
Machine Weight	20800 kg	
Driving Speed (Stowed)	5 km/h	
Driving Speed (Raised Or Extended)	0.5 km/h	
Min. Turning Radius-Axle Retracted (Inside/Outside)	16167mm/18401mm(2) 7831mm/10068mm(4)	
Min. Turning Radius-Axle Extended (Inside/Outside)	5398mm/8931mm(2) 2447mm/6142mm(4)	
Turntable Tailswing	1538mm	
Max. Gradeability (Counterweight Uphill)	40%(22°)	

Power source		
Control	12 V DC proportional control	
Emergency Power Supply	12V/220Ah	
Engine Model	Kubota V3307CCRT-EW30M	
Engine Power / Rpm	52.6kW(2200r/min)	
Max. Engine Torque	285N · m(1500 r/min)	
Engine Emission Standard	EU V	
Hydraulic Tank Capacity (Effective Volume)	290 L	
Fuel Tank Capacity	180 L	



Tire		
Tire Size	φ1159mm×445mm	
Tire Ground Pressure	11.05kg/cm ²	
Driving Wheels	4	
Braking Wheels	4	
Steering Wheels	4	

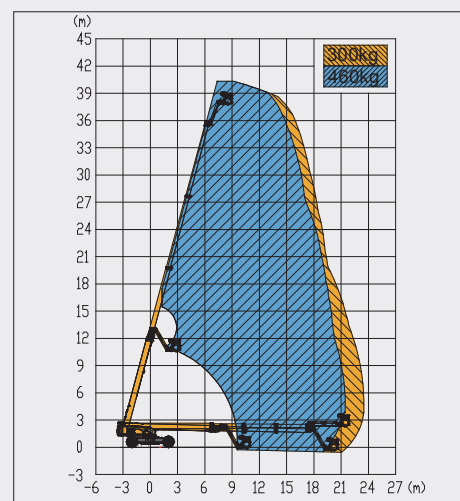

Stowed

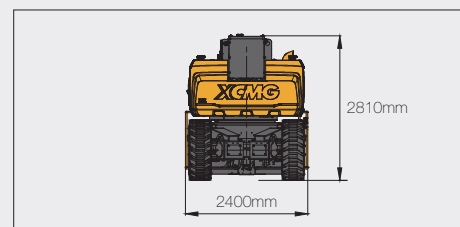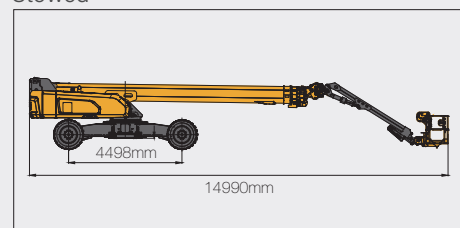

Trans

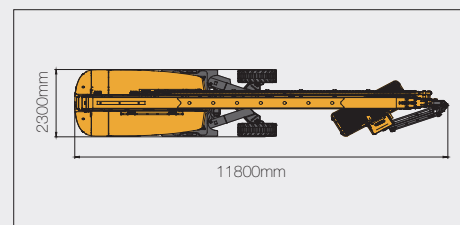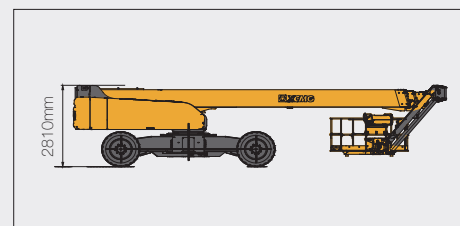

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.