XCMG | SOLID TO SUCCEED

SCISSOR LIFT
XG1332HA

Standard Configuration

- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail
- Front-Wheel Drive
- Travel Driven By Hydraulic Motor
- Full Proportion Travel And Lift Control
- 25 % Gradeability
- DC Maintenance-Free Battery
- Lubrication-Free Bearing
- Swing-Out Component Tray
- Brake Release For Towing
- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Multi-Disc Brake
- Boom Maintenance Lock
- Auto Brake System
- Pothole Protection Device
- Fault Diagnosis System
- Electric Horn
- Automatic Speed Reduction At Height
- Charging Protection System
- Removable Platform Control
- Intelligent Charger
- Hourmeter
- Side Fork Pockets
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Manual Platform Descent Valve
- Tilt Sensor And Audio Alarm

Working height
6 meters

Lift capacity
200Kg

Electric
power



Optional configuration

- Platform Searchlight
- Platform External Power Supply
- Air Line
- Platform Fire Extinguisher
- Platform Anti-Collision Device
- Platform Foot Pedal

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com


XG1332HA


SOLID TO SUCCEED

Scissor Lift-Electric


Item	Metric	Imperial
Dimensions		
Max. Working Height (Indoor/Outdoor)	6.0m/6.0m	19ft 8in/19ft 8in
Max. Platform Height (Indoor/Outdoor)	4.0m/4.0m	13ft 1in/13ft 1in
Min. Platform Height	0.96m	3ft 2in
Max. Platform Drive Height	4.0m	13ft 1in
Overall Length (Without Ladder/Outriggers)	1568(1410)mm	5ft 2in(4ft 8in)
Overall Width	810mm	2ft 8in
Overall Height (Platform Folded)	2076(1714)mm	6ft 10in(5ft 7in)
Platform Length	1372mm	4ft 6in
Platform Width	702mm	2ft 4in
Platform Extension Length	600mm	1ft 12in
Guardrail Height	1119mm	3ft 8in
Toeboard Height	168mm	7in
Wheelbase	1130mm	3ft 8in
Min. Ground Clearance (Pothole ProtectionDeployed/Undeployed)	33mm/61mm	1in/2in
Tire Size	280mm×76 mm	11in×3in
Performance		
Rated Load	200kg	441lbs
Load On Platform Extension	115kg	253.5lbs
Max. Platform Occupancy (Indoor/Outdoor)	1/1	1/1
Max. Driving Speed (Stowed)	3km/h	1.86mph
Max. Driving Speed (Raised)	0.5km/h	0.3mph
Max. Gradeability	25%	
Min. Turning Radius (Inside)	0.45m	2in
Min. Turning Radius (Outside)	1.6m	5ft 3in
Platform Raising Time	19-29s	
Platform Lowering Time	19-29s	
Max. Working Slope (Side To Side/Front And Rear)	1.5°/3°	
Tire Ground Pressure	7.49kg/cm^2	106.48psi
Driving Wheels	2	
Braking Wheels	2	
Steering Wheels	2	
Power Source	**Maintenance-free lead-acid batteries**	
Battery Voltage	24V	
Battery Capacity (3HR)	100Ah	
Battery Charger	24V/15A	
Lifting Motor	2.5/24kW/V	
Hydraulic Oil Capacity		
Hydraulic Tank Capacity	4L	1.06gal
Weight		
Machine Weight	990kg	2182.6lbs

Trans

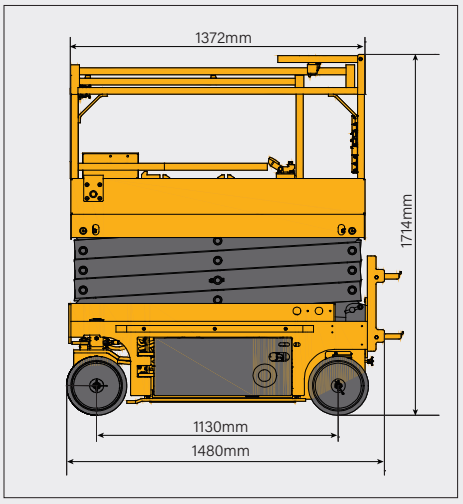

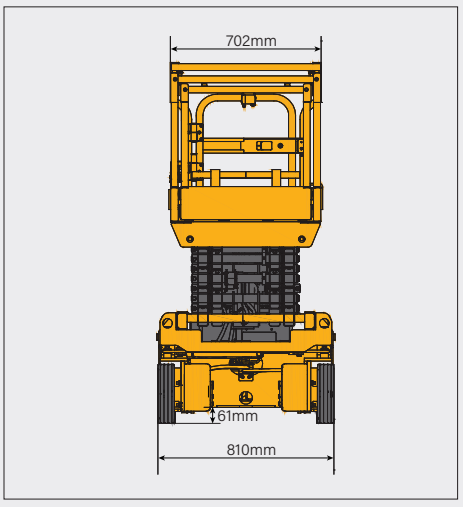

Platform Extd

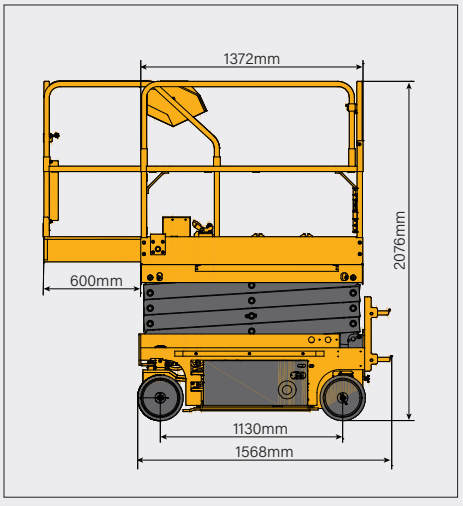

The print does not belong to the contract, nor a part of the commercial contract.We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice.Pictures are for reference only, and the specific product shall depend on the real product.The final interpretation rights belong to XCMG.