



SOLID
TO SUCCEED

SCISSOR LIFT XG2632AC

Standard configuration

- Withdrawable platform extension with position lock
- Lanyard attach points
- Self-locking half-height swing gate and folding guardrail
- Front-wheel drive
- Travel driven by AC motor
- Full proportion travel and lift control
- 25 % gradeability
- DC maintenance-free battery/lithium battery
- Lubrication-free bearing
- Swing-out component tray
- Brake release for towing
- Emergency stop devices on platform and ground controls
- Anti-slipping metal platform
- Load sensing alarm
- Lowering alarm
- 3-second delay descent
- Multi-axis tilt sensor
- Multi-disc brake
- Scissor maintenance lock
- Auto brake system
- Pothole protection device
- Onboard Diagnostic System
- Electric horn
- Scissor-elevated automatic low speed protection
- Charging protection system
- Removable platform control
- Intelligent charger
- Hourmeter
- Side fork pockets
- Flashing indicator light
- Humanized control system
- Platform control with battery level display
- Manual platform descent valve
- Tilt sensor and audio alarm



Working height
32ft 10in / 24ft 7in



Lift capacity
507 lbs



Electric
power



Optional configuration

- Platform searchlight
- Platform external power supply
- Air line
- Platform fire extinguisher
- Platform anti-collision device
- Platform foot pedal
- Boom end cover
- PCU protective bracket

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO.,LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XG2632AC



SOLID
TO SUCCEED

Scissor Lift-Electric

Item	Metric	Imperial
Dimension		
Overall length (without ladder/outriggers)	2477(2280) mm	8ft 2in(7ft 6in)
Overall width	810 mm	2ft 8in
Overall height (platform folded)	2350(1985) mm	7ft 8in(6ft 6in)
Platform length	2280 mm	7ft 6in
Platform width	810 mm	2ft 8in
Subplatform extension length	900 mm	2ft 11in
Guardrail height	1135 mm	3ft 9in
Toeboard height	150 mm	6in
Wheelbase	1877 mm	6ft 2in
Min. ground clearance (pothole protection deployed/undeployed)	20 mm/100 mm	1in / 4in


Performance		
Max. working height (indoor/outdoor)	10 m/7.5 m	32ft 10in /24ft 7in
Max. platform height (indoor/outdoor)	8 m/5.5 m	26ft 3in /18ft
Min. platform height	1.2 m	3ft 11in
Max. driving height	8 m	26ft 3in
Rated load	230 kg	507 lbs
Load on platform extension	115 kg	253.5 lbs
Max. platform occupancy (indoor/ outdoor)	2/1	
Max. driving speed (stowed)	4km/h	2.48 mph
Max. driving speed (raised)	0.8km/h	0.5 mph
Max. gradeability	25%	
Min. turning radius (inside)	0m	0 ft
Min. turning radius (outside)	2.3m	7ft 7in
Platform raising time	29-40 s	
Platform lowering time	35-45 s	
Max. working slope (side to side/front and rear)	1.5°/3°	

Power source		Maintenance-free lead-acid batteries
Battery voltage	24 V	
Battery capacity (3HR)	200 Ah	
Battery charger	24 V/30 A	
Traveling motor	0.87/24 kW/V	
Lifting motor	3.3/24 kW/V	
Hydraulic tank capacity	22L	5.81 gal


Tire		
Tire size	φ381mm×127mm	φ1ft 3in×5in
Tire ground pressure	6.23kg/cm ²	88.65 psi
Driving wheels	2	
Braking wheels	2	
Steering wheels	2	

Weight		
Total weight	2260kg	4982.45 lbs

Stowed

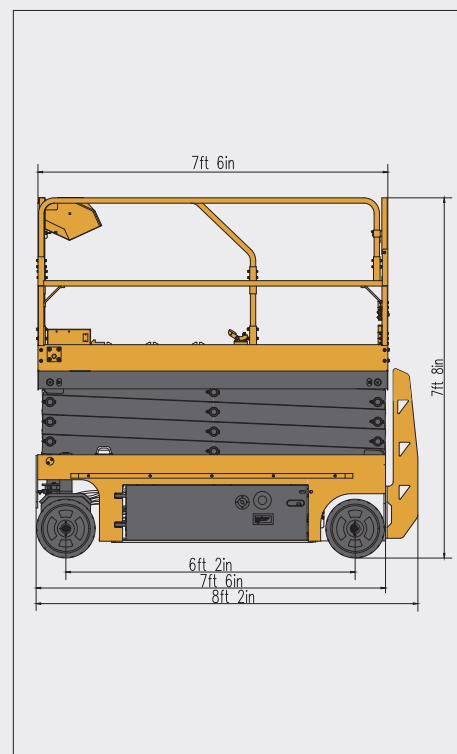

Trans

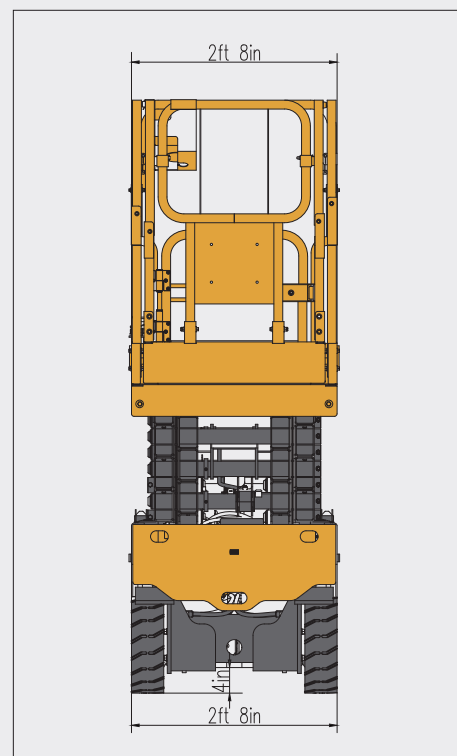

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.